

# PHILIPS

## Lighting



# MSR Gold™ SA Double Ended

## MSR Gold™ 575 SA/2 DE 1CT/40

To optimize the total lifetime of the double ended MSR Gold™ SA Double Ended lamps, the caps are plated with gold. This provides superior heat protection and thereby minimizes premature failure of the lamp and lamp holder, as well as ensuring extended consistent performance. In addition, the highly innovative P3 technology, developed by Philips, allows the lamp to be used at higher temperatures, which further extends service life and consistency of high-quality light output.

### Product data

General Information		Operating and Electrical	
Cap base	SFC-11 [ SFC-11]	Power (Rated) (Nom)	575 W
Operating position	UNIVERSAL [ Any or Universal (U)]	Lamp current (nom.)	7 A
Main application	Entertainment	Ignition supply voltage (min.)	198 V
Life to 50% failures (nom.)	750 h	<b>Controls and Dimming</b>	
System description	SA/2 DE	Dimmable	No
<b>Light Technical</b>		<b>Mechanical and Housing</b>	
Colour code	2	Cap base information	SFC-11
Luminous flux (min.)	39000 lm	<b>Luminaire Design Requirements</b>	
Luminous flux (nom.)	42000 lm	Pinch temperature (max.)	400 °C
Chromaticity coordinate X (nom.)	294	<b>Product Data</b>	
Chromaticity coordinate Y (nom.)	317	Full product code	872790091464100
Correlated colour temperature (nom.)	7500 K	Order product name	MSR Gold™ 575 SA/2 DE 1CT/40
Luminous efficacy (rated) (nom.)	73 lm/W	EAN/UPC – product	8727900914641
Color rendering index (nom.)	75		

## MSR Gold™ SA Double Ended


Order code	91464100
Numerator – quantity per pack	1
Numerator – packs per outer box	40
Material no. (12NC)	928175105114

Net weight (piece)	0.032 kg
--------------------	----------

### Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

### Dimensional drawing

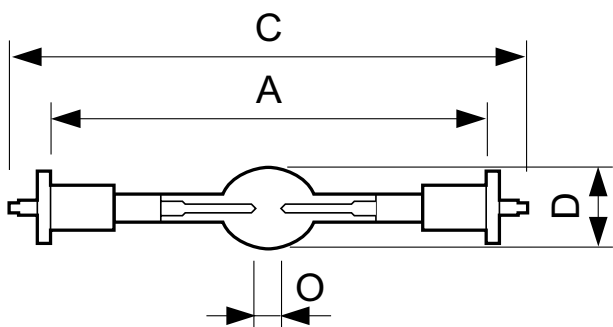

MSR GOLD 575 SA/2 DE

Product	D (max)	O	A (min)	A (max)	A	C (max)
MSR Gold™ 575 SA/2 DE	18.5 mm	5.0 mm	69.6 mm	70.4 mm	70 mm	92 mm
1CT/40						

### Photometric data

