



# MSR Hot Restrike

## MSR 250 HR 1CT/4

High-efficiency hot restrike metal halide lamps designed for optimum light collection

### Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.


### Product data

General Information	
Cap-Base	GZY9.5 [GZY9.5]
Operating Position	UNIVERSAL [Any or Universal (U)]
Life to 50% Failures (Nom)	750 h
Light Technical	
Color Code	- [Not Specified]
Luminous Flux (Min)	18,500 lm
Luminous Flux	20,000 lm
Chromaticity Coordinate X (Nom)	309
Chromaticity Coordinate Y (Nom)	320
Correlated Color Temperature (Nom)	6000 K
Luminous Efficacy (rated) (Nom)	80 lm/W
Color rendering index (CRI)	90
Arc Length O (Nom)	5.0 mm
Operating and Electrical	
Power Consumption	250 W
Lamp Current (Nom)	2.6 A

Controls and Dimming	
Dimmable	No
Product Data	
Order product name	MSR 250 HR 1CT/4
Full product name	MSR 250 HR 1CT/4
Full product code	871869641602000
Local code description	MSR250HR
Order code	928175605115
Material Nr. (12NC)	928175605115
Local order code	MSR250HR
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8718696416020
Numerator - Packs per outer box	4
EAN/UPC - Case	8718696416037


MSR Hot Restrike

Dimensional drawing



Product	D (max)	O	L (min)	L (max)	L	C (max)	F (max)	F	F (min)
MSR 250	23 mm	5.0	58 mm	60 mm	59	110 mm	24 mm	23.5	23 mm
HR 1CT/4		mm			mm			mm	

Photometric data

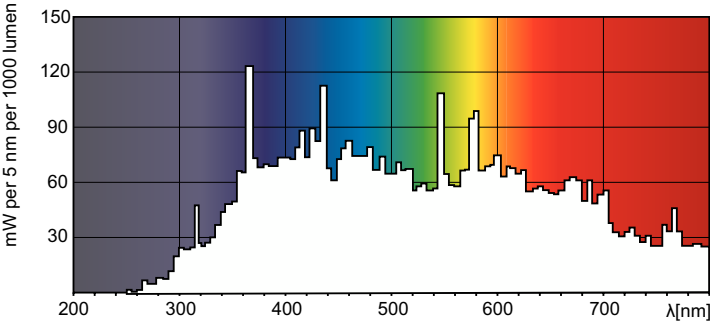

Spectral Power Distribution Colour – MSR 250 HR 1CT/4

