



MASTERColour CDM-T Elite

MASTERC CDM-T Elite 70W/930 G12 1CT/12

Single-ended, high-efficiency Ceramic Metal Halide discharge lamp

Warnings and Safety

- · Use only in totally enclosed luminaire, even during testing (IEC61167, IEC 62035, IEC60598)
- \cdot The luminaire must be able to contain hot lamp parts if the lamp ruptures
- · Use only with electronic control gear. 35W & 70W lamps may also use electromagnetic gear.
- \cdot Control gear must include end-of-life protection (IEC61167, IEC 62035)
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data

General Information					
Cap-Base	G12				
Operating Position	UNIVERSAL [Any or Universal (U)]				
Flux measurement reference	Sphere				
Life to 50% Failures (Nom)	20,000 hour(s)				
Light Technical					
Color Code	930 [CCT of 3000K]				
Luminous Flux	7,800 lm				
Color Designation	Warm White (WW)				
Chromaticity Coordinate X (Nom)	0.434				
Chromaticity Coordinate Y (Nom)	0.398				
Correlated Color Temperature (Nom)	3000 K				
Luminous Efficacy (rated) (Nom)	103 lm/W				
Color rendering index (CRI)	90				

Arc Length O (Nom)	7.15 mm				
Operating and Electrical					
Power Consumption	73.2 W				
Voltage (Nom)	85 V				
Voltage (Nom)	85 V				
Controls and Dimming					
Dimmable	No				
Mechanical and Housing					
Bulb Finish	Clear				
Bulb Shape	T19				

Datasheet, 2023, May 15 data subject to change

MASTERColour CDM-T Elite

Approval and Application	
Energy Efficiency Class	F
Mercury (Hg) Content (Max)	6.6 mg
Mercury (Hg) Content (Nom)	6.6 mg
Energy Consumption kWh/1000 h	74 kWh
EPREL Registration Number	473260

Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	872790091141
Numerator - Packs per outer box	12
EAN/UPC - Case	872790091142


Full product code

Material Nr. (12NC)

Order code

Product Data	
Order product name	MASTERC CDM-T Elite 70W/930 G12 1CT/12
Full product name	MASTERC CDM-T Elite 70W/930 G12 1CT/12

Dimensional drawing





Product	D (max)	0	L (min)	L (max)	L	C (max)
MASTERC CDM-T Elite 70W/930	20 mm	7.15 mm	55 mm	57 mm	56 mm	103 mm
G12 1CT/12						


872790091141100

928185305131 928185305131

Photometric data





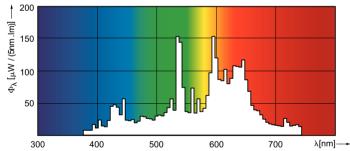



Light Distribution Diagram - MASTERC CDM-T Elite 70W/930 G12 1CT/12

Spectral Power Distribution Colour - MASTERC CDM-T Elite 70W/930 G12 1CT/12

MASTERColour CDM-T Elite


Lifetime

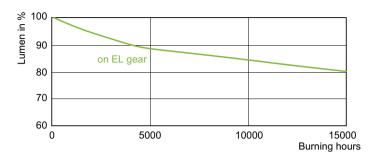

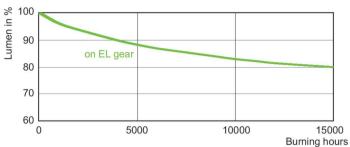

Lumen Maintenance Diagram - MASTERC CDM-T Elite 70W/930 G12 1CT/12

Lumen Maintenance Diagram - MASTERC CDM-T Elite 70W/930 G12 1CT/12

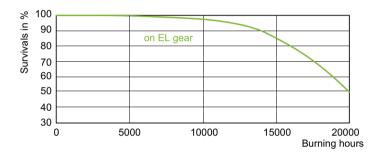

Life Expectancy Diagram - MASTERC CDM-T Elite 70W/930 G12 1CT/12



© 2023 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.