



MASTERColour CDM-TC Elite



MASTERColour CDM-TC Elite 70W/930 G8.5 1CT/12

Single-ended, compact size, high-efficiency Ceramic Metal Halide discharge lamp

Warnings and Safety

- · Use only in totally enclosed luminaire, even during testing (IEC61167, IEC 62035, IEC60598)
- The luminaire must be able to contain hot lamp parts if the lamp ruptures
- \cdot Use only with electronic control gear
- · Control gear must include end-of-life protection (IEC61167, IEC 62035)
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data

General Information					
Cap base	G8.5				
Operating position	UNIVERSAL [Any or Universal (U)]				
Flux measurement reference	Sphere				
Life to 50% failures (nom.)	20,000 h				
Light Technical					
Colour Code	930 [CCT of 3000K]				
Luminous Flux	7,800 lm				
Colour designation	Warm White (WW)				
Chromaticity Coordinate X (Nom)	0.434				
Chromaticity Coordinate Y (Nom)	0.398				
Correlated Colour Temperature	3000 K				

107 lm/W			
90			
7.15 mm			
73.2 W			
85 V			
85 V			
No			


Datasheet, 2023, April 16 data subject to change

MASTERColour CDM-TC Elite

Mechanical and Housing					
Lamp Finish	Clear				
Bulb shape	T14 [T 14 mm]				
Approval and Application					
Energy Efficiency Class	F				
Mercury (Hg) content (max.)	6.6 mg				
Mercury (Hg) content (nom.)	6.6 mg				
Energy consumption kWh/1,000 hours	5 74 kWh				
EPREL registration number	473265				
Product Data					
Order product name	MASTERC CDM-TC Elite 70W/930 G8.5 1CT/12				


Full product name	MASTERColour CDM-TC Elite 70W/930 G8.5				
	1CT/12				
Full EOC	872790091153400				
Order code	91153400				
Material no. (12 NC)	928189505131				
Local order code	70CDMTCELITE930				
SAP numerator – quantity per pack	1				
EAN/UPC — Product/Case	8727900911534				
Numerator – packs per outer box	12				
EAN/UPC - Case	8727900911541				


Dimensional drawing




Product	D (max)	0	L (min)	L (max)	L	C (max)
MASTERC CDM-TC Elite 70W/930	15 mm	7.15 mm	51 mm	53 mm	52 mm	85 mm
G8.5 1CT/12						

Photometric data





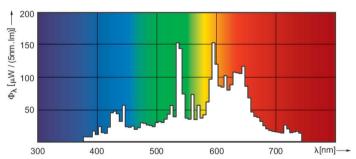



Light Distribution Diagram - MASTERC CDM-TC Elite 70W/930 G8.5 1CT/12

Spectral Power Distribution Colour - MASTERC CDM-TC Elite 70W/930 G8.5 1CT/12

MASTERColour CDM-TC Elite

Lifetime

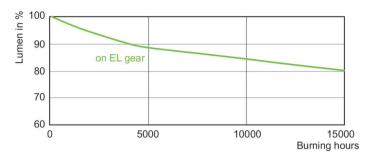

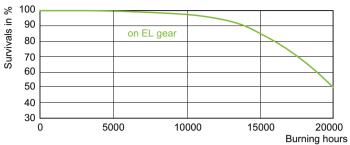

Lumen Maintenance Diagram - MASTERC CDM-TC Elite 70W/930 G8.5 1CT/12

Life Expectancy Diagram - MASTERC CDM-TC Elite 70W/930 G8.5 1CT/12



© 2023 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.