

# PHILIPS

## Lighting



# MSR Platinum (Touring/Stage)

## MSR Platinum 35 1CT/16

Today's stage designs call for lighting solutions which deliver high brightness and high-contrast beams to avoid shadow creation, as well as more compact luminaire and fixture designs to improve creative choice and design flexibility. Addressing this need, we have developed an incredibly powerful, brilliant and lightweight, compact system for the most amazing light experience – MSR Platinum 35. This lamp system provides a powerful and innovative tool to create intense lighting and delivers the same good light quality as other MSR lamps. The exceptionally short arc generates sparkling, bright light and this ultra-compact design makes the lamp suitable for smaller stage lighting fixtures.

### Product data

General Information			
Base	PGJX36 [ PGJX36]	Chromaticity Coordinate X (SO) (Nom)	0.2998
Operating Position	Universal [ Universal]	Chromaticity Coordinate Y (SO) (Max)	0.3345
Main Application	Studio/Theatre/TV	Chromaticity Coordinate Y (SO) (Min)	0.3063
Life to 50% Failures (Nom)	1000 h	Chromaticity Coordinate Y (SO) (Nom)	0.3204
System Description	na [ -]	Color Rendering Index (SO) (Min)	60.5
Light Technical		Color Rendering Index (SO) (Nom)	64.5
Color Code	2	Color Temperature (SO) (Max)	8050 K
Initial lumen (Min)	50760 lm	Color Temperature (SO) (Min)	6650 K
Initial lumen (Nom)	56400 lm	Color Temperature (SO) (Nom)	7350 K
Chromaticity Coordinate X (Nom)	0.295	Luminous Efficacy (SO) (Min)	38 lm/W
Chromaticity Coordinate Y (Nom)	0.313	Luminous Efficacy (SO) (Nom)	42.5 lm/W
Correlated Color Temperature (Nom)	7750 K	Luminous Flux (SO) (Min)	31500 lm
Chromaticity Coordinate X (SO) (Max)	0.3084	Luminous Flux (SO) (Nom)	36500 lm
Chromaticity Coordinate X (SO) (Min)	0.2913	Luminous Efficacy (rated) (Nom)	70.2 lm/W
		Color Rendering Index (Nom)	73

# MSR Platinum (Touring/Stage)


Operating and Electrical	
Power (Rated) (Nom)	800 W
Lamp Current (Nom)	12.0 A
Ignition Supply Voltage (Min)	220 V
Ignition Time (Nom)	10 s
Controls and Dimming	
Dimmable	Yes
Mechanical and Housing	
Cap-Base Information	PGJX36
Luminaire Design Requirements	
Bulb Temperature (Max)	950 °C

Pinch Temperature (Max)	450 °C
Product Data	
Order product name	MSR Platinum 35 1CT
EAN/UPC - Product	8718291120063
Order code	245977
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	16
Material Nr. (12NC)	928190905114
Net Weight (Piece)	0.053 kg

## Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.
- Lamp contains mercury. Manage in Accord with Disposal Laws. See: [www.lamprecycle.org](http://www.lamprecycle.org) or 1-800-555-0050


## Dimensional drawing




MSR Platinum 35

Product	D (max)	O	L (min)	L (max)	L	C (max)
MSR Platinum 35 1CT	23.5 mm	3.0 mm	55 mm	57 mm	56 mm	116 mm

## Photometric data

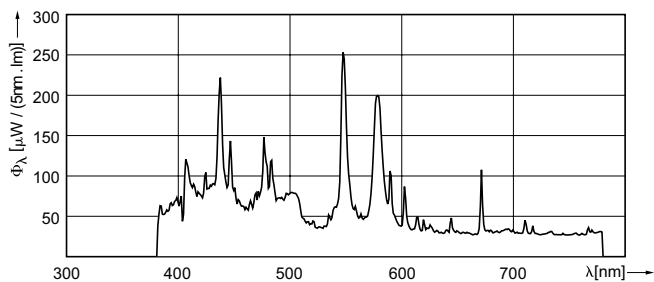

MSR Platinum 35

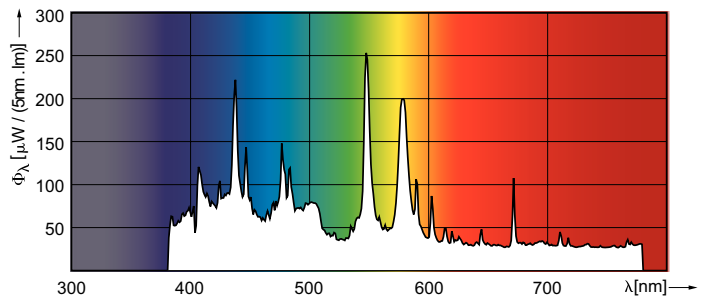

MSR Platinum 35

## MSR Platinum (Touring/Stage)

