



# MASTERColour CDM-T Elite

## MASTERC CDM-T Elite 70W/942 G12 1CT

Single-ended, high-efficiency Ceramic Metal Halide discharge lamp

### Warnings and Safety

- Use only in totally enclosed luminaire, even during testing (IEC61167, IEC 62035, IEC60598)
- Use only in totally enclosed luminaire, even during testing (IEC61167, IEC 62035, IEC60598)
- The luminaire must be able to contain hot lamp parts if the lamp ruptures
- The luminaire must be able to contain hot lamp parts if the lamp ruptures
- Use only with electronic control gear. 35W & 70W lamps may also use electromagnetic gear.
- Use only with electronic control gear. 35W & 70W lamps may also use electromagnetic gear.
- Control gear must include end-of-life protection (IEC61167, IEC 62035)
- Control gear must include end-of-life protection (IEC61167, IEC 62035)
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

### Product data


General Information		Chromaticity Coordinate X (Nom)		0.362
Cap-Base	G12	Chromaticity Coordinate Y (Nom)		0.363
Operating Position	UNIVERSAL [Any or Universal (U)]	Correlated Color Temperature (Nom)		4200 K
Life to 50% Failures (Nom)	15,000 hour(s)	Luminous Efficacy (rated) (Nom)		100 lm/W
Light Technical		Color rendering index (CRI)		90
Color Code	942 [CCT of 4200K]	Arc Length O (Nom)		7.75 mm
Color Designation	Cool White (CW)			

# MASTERC colour CDM-T Elite

Operating and Electrical	
Power Consumption	73.2 W
Voltage (Nom)	87 V
Voltage (Nom)	87 V
Controls and Dimming	
Dimmable	No
Mechanical and Housing	
Bulb Finish	Clear
Bulb Shape	T19
Approval and Application	
Mercury (Hg) Content (Nom)	6.6 mg


Energy Consumption kWh/1000 h	80 kWh
Product Data	
Order product name	MASTERC CDM-T Elite 70W/942 G12 1CT
Full product name	MASTERC CDM-T Elite 70W/942 G12 1CT
Full product code	871869648457900
Order code	928193705129
Material Nr. (12NC)	928193705129
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8718696484579
Numerator - Packs per outer box	12
EAN/UPC - Case	8718696484586

## Dimensional drawing




Product	D (max)	O	L (min)	L (max)	L	C (max)
MASTERC CDM-T Elite 70W/942 G12 1CT	20 mm	7.75 mm	55 mm	57 mm	56 mm	103 mm

## Photometric data

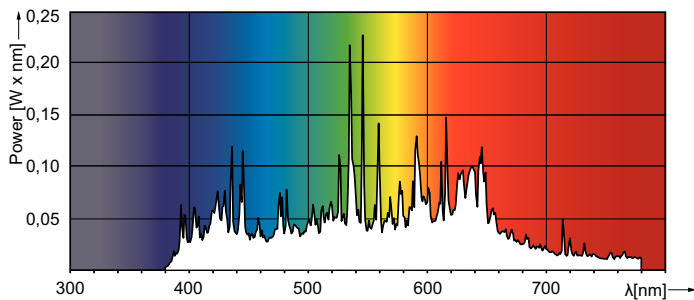



Spectral Power Distribution Colour - MASTERC CDM-T Elite 70W/942 G12 1CT

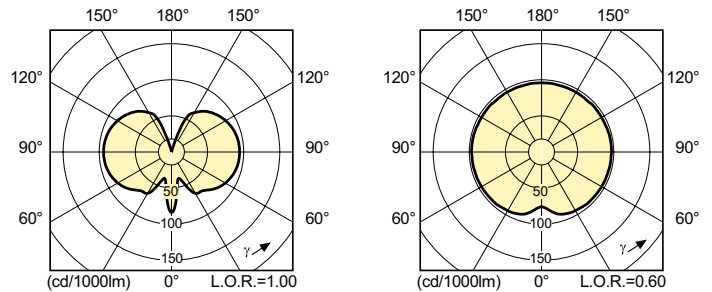

Light Distribution Diagram - MASTERC CDM-T Elite 70W/942 G12 1CT

# MASTERC colour CDM-T Elite

## Lifetime

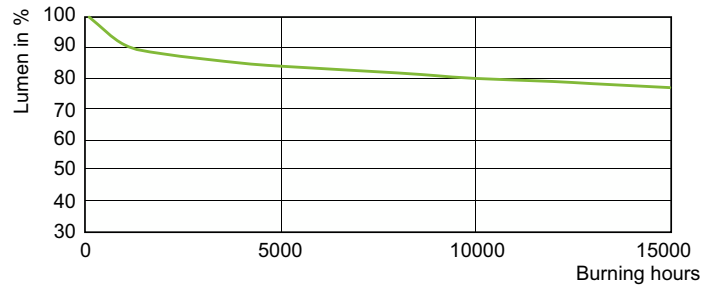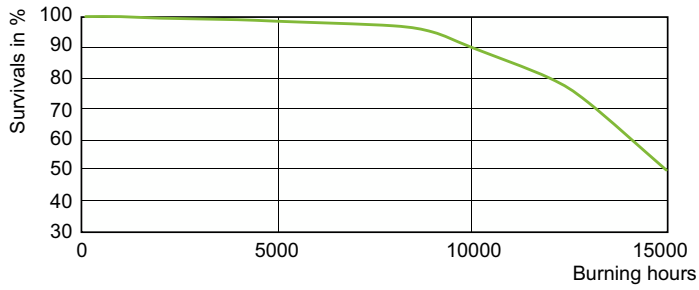

Life Expectancy Diagram - MASTERC CDM-T Elite 70W/942 G12 1CT

Lumen Maintenance Diagram - MASTERC CDM-T Elite 70W/942 G12 1CT

