



MSR Platinum (Studio)

MSR Platinum 35 ST

MSR Platinum 35 ST has been specially designed for the studio/theater world, where consistent high-quality light output, high brightness and excellent color rendering are important. This lightweight, compact system delivers intense, cool-white light for the most amazing light experience. It's a powerful and innovative tool, giving lighting designers far greater freedom and delivering the same good light quality as other MSR lamps. The exceptionally short arc generates sparkling, bright light, and the lamp's ultra-compact design makes it suitable for smaller lighting fixtures. The MSR Platinum 35 ST lamp has a balanced spectrum with extra red content for enhanced color rendering.

Product data

General Information		Lamp Luminous Efficacy EM (Nom)	
Cap base	PGJX36 [PGJX36]		70.5 lm/W
Burning Position	UNIVERSAL [Any/Universal]	Operating and Electrical	
Main application	Studio/Theatre/TV	Power (Rated) (Nom)	804 W
Life to 50% failures (nom.)	750 h	Lamp current (nom.)	11.5 A
System description	na [-]	Ignition supply voltage (min.)	220 V
Light Technical		Controls and Dimming	
Colour Code	- [Not Specified]	Dimmable	yes
Lamp Luminous Flux 25°C EL (Min)	51030 lm	Mechanical and Housing	
Lamp Luminous Flux 25°C EL (Nom)	56700 lm	Cap base information	PGJX36
Colour Temperature, horizontal (Nom)	6000 K	Luminaire Design Requirements	
Chromaticity coordinate X (SO) (nom.)	0.316	Bulb temperature (max.)	950 °C
Chromaticity coordinate Y (SO) (nom.)	0.336	Pinch temperature (max.)	450 °C
Colour Rendering Index (SO) (Nom)	80		
Luminous flux (SO) (nom.)	24000 lm		

MSR Platinum (Studio)


Pinch temperature (min.)	250 °C
Product Data	
Full product code	871829170406500
Order product name	MSR Platinum 35 ST
EAN/UPC – product	8718291704065
Order code	928194505114

Numerator – quantity per pack	1
Numerator – packs per outer box	16
Material no. (12NC)	928194505114
Net weight (piece)	0.053 kg

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.



Dimensional drawing



Product	D (max)	O	L (min)	L (max)	L	C (max)	F
MSR Platinum 35 ST	24 mm	3.6 mm	55 mm	57 mm	56 mm	116 mm	36 mm

MSR Platinum 35 ST

Photometric data

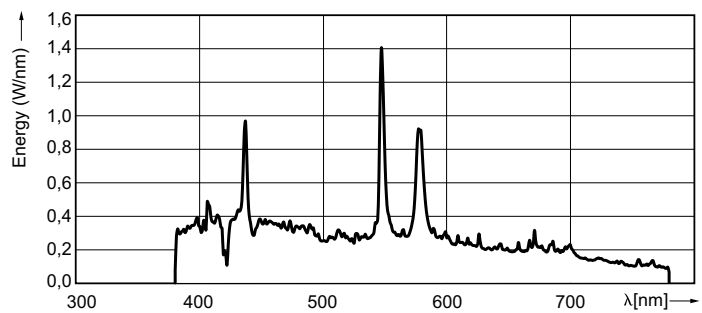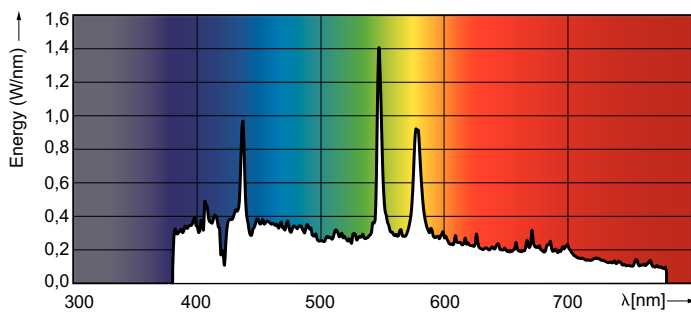

MSR Platinum (Studio)

