



SON-T

SON-T 1000W E E40 1SL/4

High Pressure Sodium lamp with clear tubular outer bulb

Warnings and Safety

- · Control gear must include end-of-life protection (IEC60662, IEC 62035)
- · Control gear must include end-of-life protection (IEC60662, IEC 62035)
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data

General Information				
Cap-Base	E40			
Operating Position	UNIVERSAL [Any or Universal (U)]			
Life to 50% Failures (Nom)	20,000 hour(s)			
Light Technical				
Color Code	220 [CCT of 2000K]			
Correlated Color Temperature (Nom)	2000 K			
Luminous Efficacy (rated) (Nom)	130 lm/W			
Color rendering index (CRI)	-			
Arc Length O (Nom)	145 mm			
Operating and Electrical				
Power Consumption	960.0 W			
Voltage (Nom)	100 V			

Voltage (Nom)	100 V		
Controls and Dimming			
Dimmable	Yes		
Mechanical and Housing			
Bulb Finish	Clear		
Bulb Shape	T65		
Approval and Application			
Mercury (Hg) Content (Nom)	22.65 mg		
Energy Consumption kWh/1000 h	1056 kWh		
Product Data			
Order product name	SON-T 1000W E E40 1SL/4		
Full product name	SON-T 1000W E E40 1SL/4		


Datasheet, 2023, April 14 data subject to change

SON-T

Full product code	871150021060945
Order code	928487400091
Material Nr. (12NC)	928487400091
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8711500210609


Numerator - Packs per outer box	4
EAN/UPC - Case	8711500210616


Dimensional drawing




Product	D (max)	0	L	C (max)
SON-T 1000W E E40 1SL/4	66 mm	145 mm	240 mm	390 mm

Photometric data






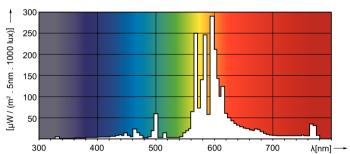


Light Distribution Diagram - SON-T 1000W E E40 1SL/4

Spectral Power Distribution Colour - SON-T 1000W E E40 1SL/4

Lifetime

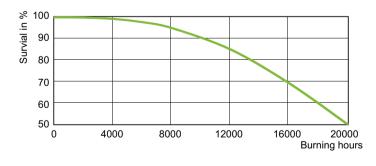

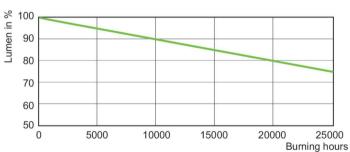

Life Expectancy Diagram - SON-T 1000W E E40 1SL/4

Lumen Maintenance Diagram - SON-T 1000W E E40 1SL/4

SON-T



© 2023 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.