



ML

## MLL 160W 220V E27 24PK

Mixed Light lamps

### Warnings and Safety


- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

### Product data

General Information	
Cap-Base	E27 [E27]
Operating Position	VBU/VBD30 [Vertical or Base Up/Base Down +/-30D]
Life to 50% Failures (Nom)	13,000 hour(s)
Light Technical	
Chromaticity Coordinate X (Nom)	399
Chromaticity Coordinate Y (Nom)	380
Correlated Color Temperature (Nom)	3600 K
Luminous Efficacy (rated) (Nom)	19 lm/W
Color rendering index (CRI)	63
Operating and Electrical	
Power Consumption	165.0 W
Voltage (Nom)	225 V
Voltage (Nom)	225 V
Controls and Dimming	
Dimmable	No


Mechanical and Housing	
Bulb Finish	Coated glass
Bulb Material	Soft Glass
Bulb Shape	E75 [E 75mm]
Approval and Application	
Mercury (Hg) Content (Nom)	12 mg
Energy Consumption kWh/1000 h	181 kWh
Product Data	
Order product name	MLL 160W 220V E27 24PK
Full product name	MLL 160W 220V E27 24PK
Full product code	872790030300100
Order code	928601008912
Material Nr. (12NC)	928601008912
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8727900303001
Numerator - Packs per outer box	24
EAN/UPC - Case	8727900303018

Dimensional drawing




Product	D (max)	C (max)
MLL 160W 220V E27 24PK	76 mm	172 mm

Photometric data

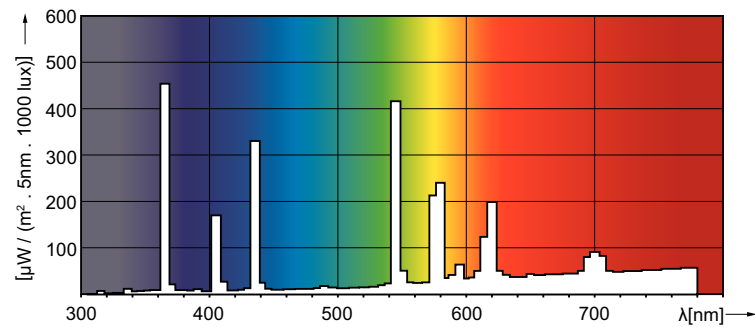

Spectral Power Distribution Colour - MLL 160W 220V E27 24PK

Lifetime

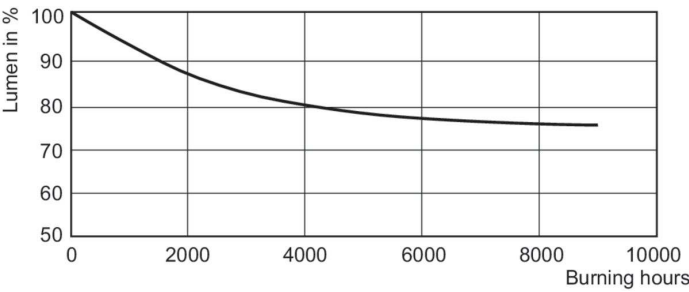

Life Expectancy Diagram - MLL 160W 220V E27 24PK

Lumen Maintenance Diagram - MLL 160W 220V E27 24PK

