# **PHILIPS** Lighting



## MasterColor CDM-T Elite Med Wattage

#### CDM-T Elite 315W/942 PGZ18.1CT/12

The Philips MasterColor Elite MW system offers an unrivalled level of light quality and performance. The lamp's sparkling white light creates a natural ambience and really brings out the best in all different types of colors. In addition, the high efficiency of the lamp and ballast together means reduced energy use and a lower cost of ownership compared to a 400W Metal Halide HID system.

#### Warnings and Safety

• R "WARNING: These lamps can cause serious skin burn and eye inflammation from short wave ultraviolet radiation if outer envelope of the lamp is broken or punctured. Do not use where people will remain for more than a few minutes unless adequate shielding or other safety precautions are used. Certain lamps that will automatically extinguish when the outer envelope is broken or punctured are commercially available." This lamp complies with FDA radiation performance standard 21 CFR subchapter J. (USA:21 CFR 1040.30 Canada: SOR/DORS/80-381)

#### **Product data**


General Information		Chromaticity Coordinate Y (Nom)	0.366
Cap-Base	PGZ18 [PGZ18]	Correlated Color Temperature (Nom)	4200 K
Operating Position	UNIVERSAL [Any or Universal (U)]	Luminous Efficacy (Rated) (Min)	105 lm/W
Features	na [Not Applicable]	Luminous Efficacy (rated) (Nom)	112 lm/W
Flux measurement reference	Sphere	Color rendering index (CRI)	93
Life to 50% Failures (Nom)	30,000 hour(s)	Arc Length O (Nom)	14 mm
Light Technical		Operating and Electrical	
Color Code	942 [CCT of 4200K]	Power Consumption	315.9 W
Luminous Flux	35,500 lm	Voltage (Nom)	100 V
Color Designation	Cool White (CW)	Voltage (Nom)	100 V
Saturated Red (R9)	80		
Chromaticity Coordinate X (Nom)	0.371		

#### MasterColor CDM-T Elite Med Wattage

Controls and Dimming		
Dimmable	No	
Mechanical and Housing		
Bulb Finish	Clear	
Bulb Shape	TMW28 [TMW 28mm]	
Approval and Application		
Energy Efficiency Class	F	
Mercury (Hg) Content (Max)	25 mg	
Energy Consumption kWh/1000 h	316 kWh	
EPREL Registration Number	473297	

CDM-T Elite 315W/942 PGZ18.1CT/12	
CDM-T Elite 315W/942 PGZ18.1CT/12	
871829154803400	
928601164831	
928601164831	
1	
8718291548034	
12	
8718291548041	

#### Dimensional drawing




### CDM-T Elite 315W/942 PGZ18.1CT/12 29 mm 1.1 inch 28 mm 188 mm 186 mm

D (max) D

D

C (max) C

#### Photometric data

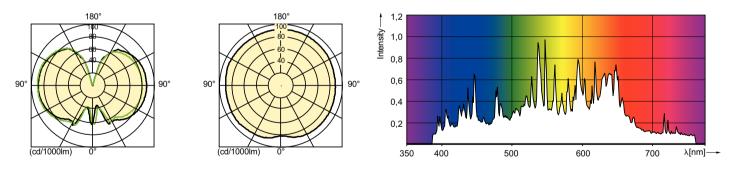


Product

Spectral Power Distribution Colour - CDM-T Elite 315W/942 PGZ18.1CT/12

Light Distribution Diagram - CDM-T Elite 315W/942 PGZ18.1CT/12

#### MasterColor CDM-T Elite Med Wattage

Lifetime

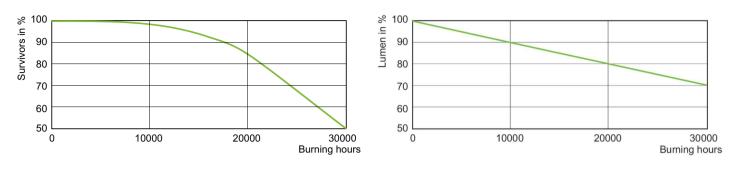

Life Expectancy Diagram - CDM-T Elite 315W/942 PGZ18.1CT/12

Lumen Maintenance Diagram - CDM-T Elite 315W/942 PGZ18.1CT/12



© 2023 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.

www.lighting.philips.com 2023, April 14 - data subject to change