

# MASTER LEDtube EM/ Mains T8

## MAS LEDtube STD 1200mm 16W840 T8 I

The Philips MASTER LEDtube integrates a LED light source into a traditional fluorescent form factor. Its unique design creates a perfectly uniform visual appearance, which cannot be distinguished from traditional fluorescent. These T8 LED tubes are the right choice for absolute performance and are designed to stand up to everyday conditions. Unparalleled savings thanks to low energy consumption and an exceptionally long lifetime ensure this tube masters every demanding application.

#### **Warnings and Safety**

• NOTE: The overall energy efficiency and light distribution of any installation that uses these lamps will be determined by the design of the installation.

#### **Product data**

General Information					
Cap-Base	G13 [Medium Bi-Pin Fluorescent]				
Nominal lifetime	40,000 hour(s)				
Switching Cycle	50,000				
Lighting Technology	LED				
EU RoHS compliant	Yes				
Light Technical					
Color Code	840 [CCT of 4000K]				
Beam Angle (Nom)	150 degree(s)				
Luminous Flux	1,600 lm				
Correlated Color Temperature (Nom)	4000 K				
Color Consistency	<6				
Color rendering index (CRI)	83				

LLMF At End Of Nominal Lifetime (Nom) 70 %				
Operating and Electrical				
Line Frequency	50 to 60 Hz			
Input Frequency	50 to 60 Hz			
Power Consumption	16 W			
Starting Time (Nom)	0.5 s			
Warm-up time to 60% light	Instant full light s			
Power Factor (Fraction)	0.9			
Voltage (Nom)	220-240 V			
Temperature				
Ambient temperature range	-20 °C to 45 °C			


Datasheet, 2023, December 6 data subject to change

## **MASTER LEDtube EM/Mains T8**

T-Case Maximum (Nom)	55 ℃			
Controls and Dimming				
Dimmable	No			
Mechanical and Housing				
Product Length	47-1/4 inch			
Approval and Application				
Energy Saving Product	Yes			
Suitable For Accent Lighting	No			
Approval Marks	CE marking RoHS compliance KEMA Keur			
	certificate			
Energy Consumption kWh/1000 h	16 kWh			

MAS LEDtube STD 1200mm 16W840 T8 I			
W840 T8 I			


### Dimensional drawing



Product	D1	D2	A1	A2	А3
MAS LEDtube STD 1200mm	2.35 mm	27.8 mm	1,198.0 mm	1,205.0 mm	1,212.0 mm
16W840 T8 I					

#### Photometric data



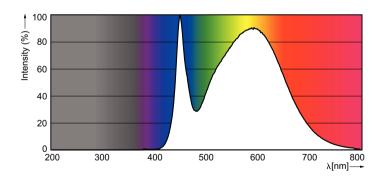

Light Distribution Diagram - MAS LEDtube STD 1200mm 16W840 T8 I

Spectral Power Distribution Colour - MAS LEDtube STD 1200mm 16W840 T8

## **MASTER LEDtube EM/Mains T8**



© 2023 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.