

Xitanium Outdoor LED Drivers Programmable

Xitanium 75W 0.70A Prog+ GL-Z sXt

Xitanium Outdoor LED Drivers Programmable

Product data

General Information	
Lighting Technology	LED
Operating and Electrical	
Line Frequency	50 to 60 Hz
Input Frequency	50 to 60 Hz
Total Harmonic Distortion IEC (Max)	20 %
Power Consumption	84 W
Maximum Efficiency at Full Load	90 %
Output Current (Nom)	100-700 mA
Output Current Tolerance (Max)	5 %
Output Current Tolerance (Min)	-5 %
Power Factor 50% Load (Min)	0.94
Earth Leakage Current (Max)	0.35 mA
Input Current (Max)	380 mA
Inrush Current Peak (Max)	80 A
Output Power (Nom)	25-75 W
Inrush Current Width to 50% of Peak	150 µs
Number of Products on MCB (16A Type B) (Max)	11
Wiring	
Output Wire Length	275.0 mm


Input Wire Cross Section (Nom)	0.82 mm²
Temperature	
Ambient temperature range	-40 °C to 55 °C
T-Case Lifetime (Nom)	68 °C
T-Case Maximum (Max)	80 °C
Module Temperature Protection	Programmable
T-Case Switch Off (Nom)	85 °C
Controls and Dimming	
Control Interface	1-10V/AmpDim/DALI/Dynadimmer
Dimming Range	100-10 %
Constant light output	Programmable
Mechanical and Housing	
Housing Color	Black
Approval and Application	
Ingress protection code	-
Surge Protection (Common/Differential)	4/4 kV
Isolation Classification	Class II

Xitanium Outdoor LED Drivers Programmable

Approval Marks	ENEC certificate CE marking RoHS compliance
Product Data	
Order product name	Xitanium 75W 0.70A Prog+ GL-Z sXt
Full product name	Xitanium 75W 0.70A Prog+ GL-Z sXt
Full product code	871829124515500
Order code	929000710103

Material Nr. (12NC)	929000710103
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8718291245155
Numerator - Packs per outer box	12
EAN/UPC - Case	8718291245162

Dimensional drawing

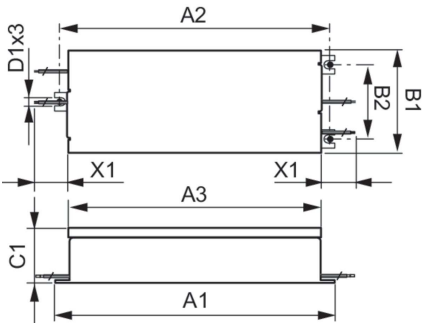

Product	D1	A2	B2	C1	A1	A3	X1	B1
Xitanium 75W	5.5	155	50 mm	38 mm	165	147.4	275	70 mm
0.70A Prog+ GL-Z sXt	mm	mm			mm	mm	mm	

