



# PAR30/PAR20 LED

## 120V PAR30S 12W 35D 2700K 900 D AF SO

Philips PAR30S LED Single Optic Lamps with AirFlux Technology provide superior lighting aesthetics and optimal thermal efficiency in a sleek, lightweight design.

### Product data


General Information	
Cap-Base	E26 [ Single Contact Medium Screw]
Nominal Lifetime (Nom)	25000 h
Switching Cycle	50000X
Technical Type	12-75W
Light Technical	
Color Code	827 [ CCT of 2700K]
Beam Angle (Nom)	35 °
Luminous Flux (Nom)	850 lm
Luminous Flux (Rated) (Nom)	850 lm
Luminous Intensity (Nom)	2400 cd
Color Designation	Warm White (WW)
Rated Beam Angle	35 °
Correlated Color Temperature (Nom)	2700 K
Luminous Efficacy (rated) (Nom)	71 lm/W
Color Consistency	<6
Color Rendering Index (Nom)	80
LLMF At End Of Nominal Lifetime (Nom)	70 %
Operating and Electrical	
Input Frequency	60 Hz
Power (Rated) (Nom)	12 W
Lamp Current (Nom)	121 mA
Starting Time (Nom)	0.5 s

Warm Up Time to 60% Light (Nom)	0.5 s
Power Factor (Nom)	0.85
Voltage (Nom)	120 V
Temperature	
T-Case Maximum (Nom)	89 °C
Controls and Dimming	
Dimmable	Yes
Approval and Application	
Energy Efficiency Label (EEL)	Not applicable
Suitable For Accent Lighting	Yes
Energy Certifications	Energy Star

Product Data	
Order product name	120V PAR30S 12W 35D 2700K 900 D AF SO
EAN/UPC - Product	046677435325
Order code	92900112804
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	6
Material Nr. (12NC)	92900112804
Net Weight (Piece)	0.001 kg

# PAR30/PAR20 LED



## Dimensional drawing




Par30S CL 120V 12W-75W 36D 2700K E26 D

Product	D	C
120V PAR30S 12W 35D 2700K 900 D AF SO	92 mm	92.7 mm

## Photometric data

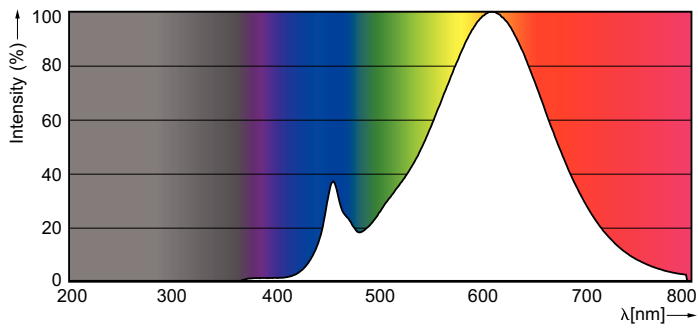

Accent Lighting - Spots



Calculation Photometrics 4.3

Philips Lighting B.V.

Page 1/1

LEDspot, PAR30S 12W-75W 36D 2700K E26

## PAR30/PAR20 LED

