



MASTER LEDspot MV

MAS LEDspotMV DimTone 4-35W GU10 40D

Delivering a warm, halogen-like accent beam, MASTER LEDspot MV is a perfect fit for spot lighting (track, corridors, lift lobbies, display cases and cabinets) in the hospitality industry. It is particularly suitable to public areas where the light is on 24/7, such as lobbies, corridors, stairwells. MASTER LEDspot MV delivers huge energy savings and minimises maintenance cost without any compromise on brightness, enabling hospitality owners to achieve a return on their investment within one year. These LEDspots are compatible with most existing fixtures with a GU10 holder and designed as a retrofit replacement for halogen or incandescent spots. The dimmable versions drive further efficiencies, while helping to create the desired atmosphere. For environments where the right atmosphere needs to be created (e.g. bars and restaurants), the “DimTone” feature could be useful. This is a LED feature that creates a warmer tone once light is dimmed down to lower intensities.

Product data

General Information		Operating and Electrical	
Cap base	GU10 [GU10]	Rated beam angle	40 °
Nominal lifetime (nom.)	50000 h	Correlated colour temperature (nom.)	2200-2700 K
Switching cycle	50000X	Luminous efficacy (rated) (nom.)	70.00 lm/W
Technical type	4-35W	Colour consistency	<6
		Color rendering index (nom.)	80
		LLMF at end of nominal lifetime (nom.)	70 %
		Luminous Flux in 90° Cone (Rated)	280 lm
Light Technical		Operating and Electrical	
Colour code	822-827 [tunable warm white]	Input frequency	50 to 60 Hz
Beam Angle (Nom)	40 °	Power (Rated) (Nom)	4 W
Light distribution	40D [Medium beam]	Lamp current (nom.)	22 mA
Luminous flux (nom.)	305 lm	Wattage equivalent	35 W
Luminous flux (rated) (nom.)	305 lm	Starting time (nom.)	0.5 s
Luminous intensity (nom.)	600 cd		
Colour designation	Warm white (WW)		

MASTER LEDspot MV

Warm-up time to 60% light (nom.)	instant full light
Power factor (nom.)	0.5
Voltage (Nom)	220-240 V

Temperature

T-Case maximum (nom.)	70 °C
-----------------------	-------

Controls and Dimming

Dimmable	yes
----------	-----

Approval and Application

Energy efficiency label (EEL)	A+
Suitable for accent lighting	Yes
Energy Consumption kWh/1000 h	4 kWh


Product Data

Full product code	871869643830500
Order product name	MAS LEDspotMV DimTone 4-35W GU10 40D
EAN/UPC – product	8718696438305
Order code	43830500
Local Code	MLED4GU10DT40D
Numerator – quantity per pack	1
Numerator – packs per outer box	10
Material no. (12NC)	929001130702
Net weight (piece)	0.036 kg

Warnings and Safety

- Operating temperature range is between -20° C and 45° C ambient
- Only to apply in dry or damp locations and most of open fixtures with lamp-holders that offer sufficient space (10 mm free air space)
- Not intended for use with emergency light fixtures or exit lights



Dimensional drawing



LED DimTone 4-35W GU10 40D

Product	D	C
MAS LEDspotMV DimTone 4-35W GU10 40D	50 mm	55 mm

Photometric data

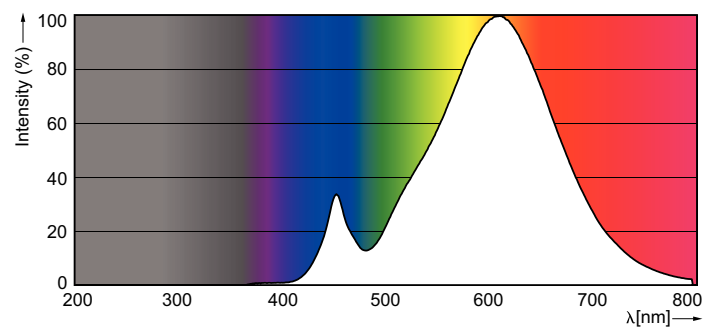

MASTER LEDspot MV

