



PAR30/PAR20 LED

120V PAR30L 12.7W 25D 3000K 900 D SO

Philips PAR30S LED Single Optic Lamps with AirFlux Technology provide superior lighting aesthetics and optimal thermal efficiency in a sleek, lightweight design.

Product data

General Information	
Cap-Base	E26 [Single Contact Medium Screw]
Nominal Lifetime (Nom)	25000 h
Switching Cycle	50000X
Technical Type	12.7-75W
Light Technical	
Color Code	830 [CCT of 3000K]
Beam Angle (Nom)	25 °
Luminous Flux (Nom)	900 lm
Luminous Flux (Rated) (Nom)	900 lm
Luminous Intensity (Nom)	5000 cd
Color Designation	White (WH)
Rated Beam Angle	25 °
Correlated Color Temperature (Nom)	3000 K
Luminous Efficacy (rated) (Nom)	71 lm/W
Color Consistency	<6
Color Rendering Index (Nom)	80
LLMF At End Of Nominal Lifetime (Nom)	70 %
Operating and Electrical	
Input Frequency	60 Hz
Power (Rated) (Nom)	12.7 W
Lamp Current (Nom)	125 mA
Wattage Equivalent	75 W

Starting Time (Nom)	0.5 s
Warm Up Time to 60% Light (Nom)	0.5 s
Power Factor (Nom)	0.85
Voltage (Nom)	120 V

Temperature	
T-Case Maximum (Nom)	89 °C


Controls and Dimming	
Dimmable	Yes

Approval and Application	
Energy Efficiency Label (EEL)	Not applicable
Suitable For Accent Lighting	Yes
Energy Certifications	Energy Star

Product Data	
Order product name	120V PAR30L 12.7W 25D 3000K 900 D SO
EAN/UPC - Product	046677454678
Order code	929001132404
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	6
Material Nr. (12NC)	929001132404
Net Weight (Piece)	0.001 kg

PAR30/PAR20 LED



Dimensional drawing

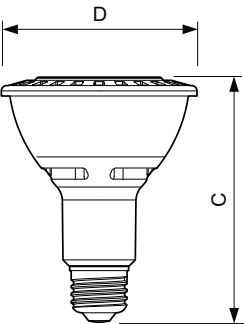

PAR30L CL 120V 12.5W-75W 25D 3000K E26 D

Product	D	C
120V PAR30L 12.7W 25D 3000K 900 D SO	92 mm	116 mm

Photometric data

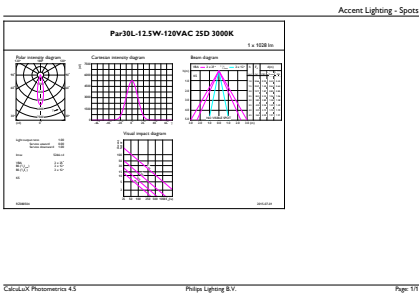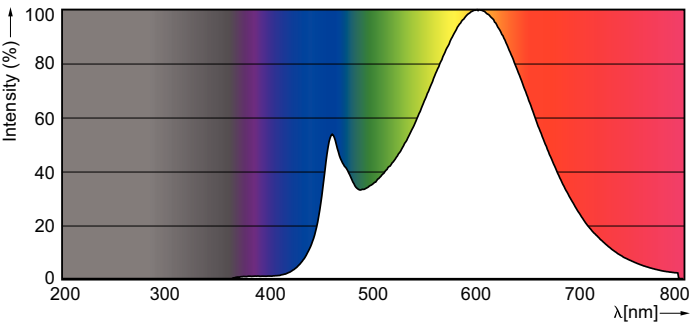

LEDspot, PAR30L 12.5W-75W 25D 3000K E26

