



PAR30/PAR20 LED

120V PAR30L 12.7W 35D 2700K 900 D SO


Philips PAR30S LED Single Optic Lamps with AirFlux Technology provide superior lighting aesthetics and optimal thermal efficiency in a sleek, lightweight design.

Product data

General Information		Temperature	
Cap-Base	E26 [Single Contact Medium Screw]	Warm Up Time to 60% Light (Nom)	0.5 s
Nominal Lifetime (Nom)	25000 h	Power Factor (Nom)	0.85
Switching Cycle	50000X	Voltage (Nom)	120 V
Technical Type	12.7-75W	Temperature	
		T-Case Maximum (Nom)	89 °C
Light Technical		Controls and Dimming	
Color Code	827 [CCT of 2700K]	Dimmable	Yes
Beam Angle (Nom)	35 °	Approval and Application	
Luminous Flux (Nom)	850 lm	Energy Efficiency Label (EEL)	Not applicable
Luminous Flux (Rated) (Nom)	850 lm	Suitable For Accent Lighting	Yes
Luminous Intensity (Nom)	2300 cd	Energy Certifications	Energy Star
Color Designation	Warm White (WW)	Product Data	
Rated Beam Angle	35 °	Order product name	120V PAR30L 12.7W 35D 2700K 900 D SO
Correlated Color Temperature (Nom)	2700 K	EAN/UPC - Product	046677454692
Luminous Efficacy (rated) (Nom)	67 lm/W	Order code	929001132604
Color Consistency	<6	Numerator - Quantity Per Pack	1
Color Rendering Index (Nom)	80	Numerator - Packs per outer box	6
LLMF At End Of Nominal Lifetime (Nom)	70 %	Material Nr. (12NC)	929001132604
Operating and Electrical		Net Weight (Piece)	0.001 kg
Input Frequency	60 Hz		
Power (Rated) (Nom)	12.7 W		
Lamp Current (Nom)	125 mA		
Starting Time (Nom)	0.5 s		

PAR30/PAR20 LED



Dimensional drawing




PAR30L CL 120V 12.5W-75W 35D 2700K E26 D

Product	D	C
120V PAR30L 12.7W 35D 2700K 900 D SO	92 mm	116 mm

Photometric data

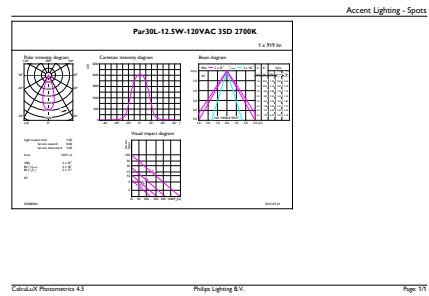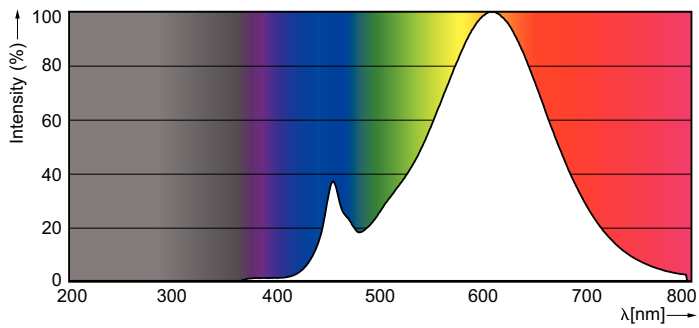

LEDspot, PAR30L 12.5W-75W 35D 2700K E26



PAR30/PAR20 LED

