



LED PAR38

11PAR38/F25/830 ND 120V 6/1

Philips LED spots with a single optic beam, provide a clean beam that's free from shadows with beam angles from 15 and 40 degrees to suit every general lighting application.

Product data

General Information	
Base	E26 [Single Contact Medium Screw]
Nominal Lifetime (Nom)	10000 h
Switching Cycle	50000X
Technical Type	11-90W
Light Technical	
Color Code	830 [CCT of 3000K]
Beam Angle (Nom)	25 °
Initial lumen (Nom)	950 lm
Luminous Flux (Rated) (Nom)	950 lm
Luminous Intensity (Nom)	4085 cd
Color Designation	White (WH)
Rated Beam Angle	25 °
Correlated Color Temperature (Nom)	3000 K
Luminous Efficacy (rated) (Nom)	86 lm/W
Color Consistency	<6
Color Rendering Index (Nom)	80
LLMF At End Of Nominal Lifetime (Nom)	70 %
Operating and Electrical	
Input Frequency	60 Hz
Power (Rated) (Nom)	11 W
Lamp Current (Nom)	170 mA

Starting Time (Nom)	0.5 s
Warm Up Time to 60% Light (Nom)	0.5 s
Power Factor (Nom)	0.5
Voltage (Nom)	120 V

Temperature	
T-Case Maximum (Nom)	75 °C


Controls and Dimming	
Dimmable	No

Approval and Application	
Energy Efficiency Label (EEL)	Not applicable
Suitable For Accent Lighting	Yes

Product Data	
Order product name	120V PAR38 11W 25D 3000K ND
EAN/UPC - Product	046677457990
Order code	457993
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	6
Material Nr. (12NC)	929001174766
Net Weight (Piece)	0.609 kg

LED PAR38




Dimensional drawing



Product	D	C
120V PAR38 11W 25D 3000K ND	120 mm	130 mm

PAR38 120V 11W-90W 25D 3000K E26 ND

Photometric data

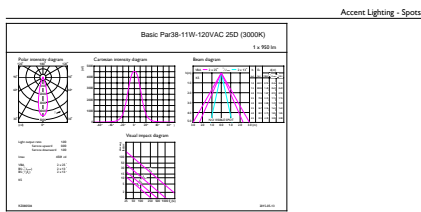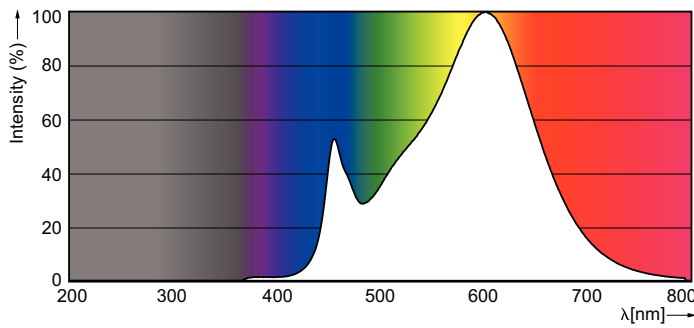

LEDspot, PAR38 11W-90W 950lm 3000K 25D

