



MASTER Plastic LEDbulbs

MAS LEDbulb DT 15-100W A67 E27 827 FR

MASTER LEDbulb range delivers a dimmable glow effect for a welcoming, warm atmosphere, making it ideal for general lighting applications in the hospitality industry. Its unique design radiates warm light in all directions, making it a true alternative to the incandescent lamp. It is particularly suitable for public areas such as lobbies, corridors, stairwells, where the light is always on. Compatible with existing fixtures with an E27 or a B22 holder and designed for retrofit replacement of incandescent bulbs, MASTER LEDbulb delivers huge energy savings and minimises maintenance cost without any compromise on light quality.

Warnings and Safety

- Operating temperature range is between -20° C and 45° C ambient
- Operating temperature range is between -20° C and 45° C ambient
- Only to apply in dry or damp locations and most of open fixtures with lamp-holders that offer sufficient space (10 mm free air space)
- Only to apply in dry or damp locations and most of open fixtures with lamp-holders that offer sufficient space (10 mm free air space)
- Not intended for use with emergency light fixtures or exit lights
- Not intended for use with emergency light fixtures or exit lights


Product data

General Information		Light Technical	
Cap-Base	E27 [E27]	Color Code	822-827 [tunable warm white]
Nominal lifetime	25,000 hour(s)	Luminous Flux	1,521 lm
Switching Cycle	50,000	Color Designation	Warm White (WW)
Lighting Technology	LED	Luminous Efficacy (rated) (Nom)	101 lm/W
EU RoHS compliant	Yes	Color Consistency	<6
		Color rendering index (CRI)	80

MASTER Plastic LEDbulbs

LLMF At End Of Nominal Lifetime (Nom)	70 %
Operating and Electrical	
Line Frequency	50 to 60 Hz
Input Frequency	50 to 60 Hz
Power Consumption	15 W
Lamp Current (Nom)	84 mA
Wattage Equivalent	100 W
Starting Time (Nom)	0.5 s
Warm-up time to 60% light	0.5 s
Power Factor (Fraction)	0.7
Voltage (Nom)	220-240 V
Temperature	
T-Case Maximum (Nom)	105 °C
Controls and Dimming	
Dimmable	Yes
Mechanical and Housing	
Bulb Shape	A67 [A 67mm]

Dimensional drawing




Approval and Application	
Energy Saving Product	Yes
Suitable For Accent Lighting	No
Energy Consumption kWh/1000 h	15 kWh
Product Data	
Order product name	MAS LEDbulb DT 15-100W A67 E27 827 FR
Full product name	MAS LEDbulb DT 15-100W A67 E27 827 FR
Full product code	87186965555200
Order code	929001184402
Material Nr. (12NC)	929001184402
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8718696555552
Numerator - Packs per outer box	6
EAN/UPC - Case	8718696555569


Product	D	C
MAS LEDbulb DT 15-100W A67 E27 827 FR	70.6 mm	137.2 mm

MASTER Plastic LEDbulbs


Photometric data



Spectral Power Distribution Colour - MAS LEDbulb DT 15-100W A67 E27 827 FR



Light Distribution Diagram - MAS LEDbulb DT 15-100W A67 E27 827 FR

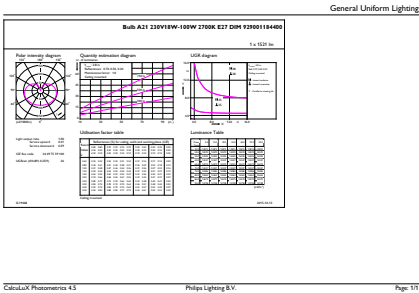

General uniform lighting - MAS LEDbulb DT 15-100W A67 E27 827 FR

