



PAR30/PAR20 LED

12 PAR30S/F25 2700 DIM Black

Philips PAR30S LED Single Optic Lamps with AirFlux Technology provide superior lighting aesthetics and optimal thermal efficiency in a sleek, lightweight design.

Product data

General Information	
Cap-Base	E26 [Single Contact Medium Screw]
Nominal Lifetime (Nom)	25000 h
Switching Cycle	50000X
Technical Type	12-75W
Light Technical	
Color Code	827 [CCT of 2700K]
Beam Angle (Nom)	25 °
Luminous Flux (Nom)	850 lm
Luminous Flux (Rated) (Nom)	850 lm
Luminous Intensity (Nom)	5000 cd
Color Designation	Warm White (WW)
Rated Beam Angle	25 °
Correlated Color Temperature (Nom)	2700 K
Luminous Efficacy (rated) (Nom)	71 lm/W
Color Consistency	<6
Color Rendering Index (Nom)	80
LLMF At End Of Nominal Lifetime (Nom)	70 %
Operating and Electrical	
Input Frequency	60 Hz
Power (Rated) (Nom)	12 W
Lamp Current (Nom)	121 mA
Wattage Equivalent	75 W

Starting Time (Nom)	0.5 s
Warm Up Time to 60% Light (Nom)	0.5 s
Power Factor (Nom)	0.85
Voltage (Nom)	120 V

Temperature	
T-Case Maximum (Nom)	89 °C


Controls and Dimming	
Dimmable	Yes

Approval and Application	
Energy Efficiency Label (EEL)	Not applicable
Suitable For Accent Lighting	Yes
Energy Certifications	Energy Star

Product Data	
Order product name	12 PAR30S/F25 2700 DIM Black
EAN/UPC - Product	046677459642
Order code	929001186304
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	6
Material Nr. (12NC)	929001186304
Net Weight (Piece)	0.001 kg

PAR30/PAR20 LED




Dimensional drawing



PAR30S 120V 12W-75W 25D 2700K E26 D

Product	D	C
12 PAR30S/F25 2700 DIM Black	92 mm	92.7 mm

Photometric data

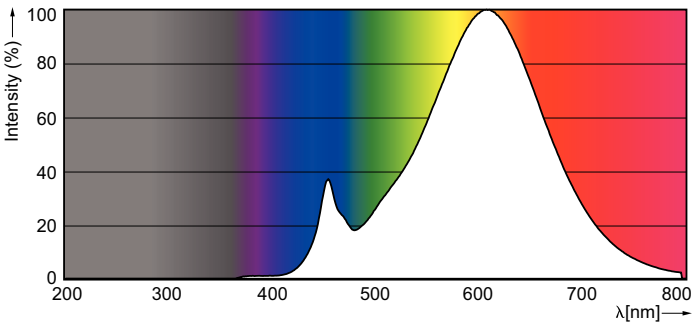

LEDspot, PAR30S 12W-75W 25D 2700K E26 120V