



Standard LED bulbs

Standard LEDBulb 7-40W E27 3000K 100-240V A19 MX

Standard LED bulbs are compatible with existing fixtures with a E27 holder and are designed for retrofit replacement of incandescent, halogen and energy saving bulbs. They deliver huge energy savings and minimize maintenance costs. The Standard LED bulb is the perfect bulb for your basic lighting needs. It provides the beautiful light and performance you expect from the LED technology at an affordable price.

Product data

General Information	
Cap-Base	E27 [E27]
Nominal lifetime	25,000 hour(s)
Switching Cycle	50,000
Lighting Technology	LED
EU RoHS compliant	Yes
Light Technical	
Color Code	830 [CCT of 3000K]
Beam Angle (Nom)	150 degree(s)
Luminous Flux	600 lm
Color Designation	White (WH)
Correlated Color Temperature (Nom)	3000 K
Luminous Efficacy (rated) (Nom)	85.71 lm/W
Color Consistency	ANSI
Color rendering index (CRI)	80
LLMF At End Of Nominal Lifetime (Nom)	70 %
Operating and Electrical	
Line Frequency	50 to 60 Hz
Input Frequency	50 to 60 Hz


Power Consumption	7 W
Wattage Equivalent	40 W
Starting Time (Nom)	0.5 s
Warm-up time to 60% light	0.5 s
Power Factor (Fraction)	0.92
Voltage (Nom)	100-240 V
Temperature	
T-Case Maximum (Nom)	80 °C
Controls and Dimming	
Dimmable	No
Mechanical and Housing	
Bulb Finish	Frosted
Bulb Shape	A19 [A 19mm]
Product Data	
Order product name	LEDBulb 7-40W E27 3000K 100-240V A19 MX
Full product name	Standard LEDBulb 7-40W E27 3000K 100-240V A19 MX

Standard LED bulbs

Order code	929001195141
Material Nr. (12NC)	929001195141
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	046677462888


Numerator - Packs per outer box	6
EAN/UPC - Case	50046677462883

Dimensional drawing




Product	D	C
LEDBulb 7-40W E27 3000K 100-240V A19 MX	60 mm	110 mm

Photometric data

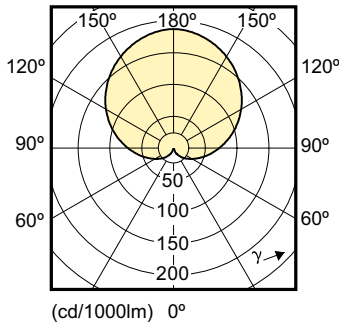

Light Distribution Diagram - LEDBulb 7-40W E27 3000K 100-240V A19 MX

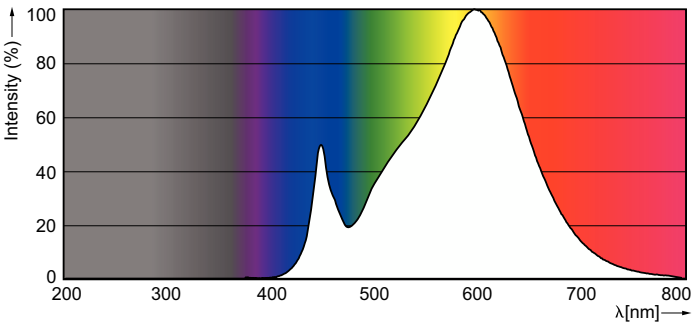

Spectral Power Distribution Colour - LEDBulb 7-40W E27 3000K 100-240V A19 MX

