



Standard LED bulbs

LEDBulb 7-40W E27 3000K 100-240V A19 MX

Standard LED bulbs are compatible with existing fixtures with a E27 holder and are designed for retrofit replacement of incandescent, halogen and energy saving bulbs. They deliver huge energy savings and minimize maintenance costs. The Standard LED bulb is the perfect bulb for your basic lighting needs. It provides the beautiful light and performance you expect from the LED technology at an affordable price.


Product data

General Information		Wattage Equivalent	
Cap-Base	E27 [E27]	40 W	
Nominal lifetime	25,000 hour(s)	Starting Time (Nom)	
Switching Cycle	50,000	0.5 s	
Lighting Technology	LED	Warm-up time to 60% light	
EU RoHS compliant	Yes	0.5 s	
Light Technical		Power Factor (Fraction)	
Color Code	830 [CCT of 3000K]	0.92	
Beam Angle (Nom)	150 degree(s)	Voltage (Nom)	
Luminous Flux	600 lm	100-240 V	
Color Designation	White (WH)	Temperature	
Correlated Color Temperature (Nom)	3000 K	T-Case Maximum (Nom)	
Luminous Efficacy (rated) (Nom)	85.71 lm/W	80 °C	
Color Consistency	ANSI	Controls and Dimming	
Color rendering index (CRI)	80	Dimmable	
LLMF At End Of Nominal Lifetime (Nom)	70 %	No	
Operating and Electrical		Mechanical and Housing	
Line Frequency	50 to 60 Hz	Bulb Finish	
Input Frequency	50 to 60 Hz	Frosted	
Power Consumption	7 W	Bulb Shape	
		A19 [A 19mm]	
		Product Data	
		Order product name	
		LEDBulb 7-40W E27 3000K 100-240V A19 MX	
		Full product name	
		LEDBulb 7-40W E27 3000K 100-240V A19 MX	
		Order code	
		929001195141	
		Material Nr. (12NC)	
		929001195141	
		Numerator - Quantity Per Pack	
		1	

Standard LED bulbs


EAN/UPC - Product/Case	046677462888
Numerator - Packs per outer box	6
EAN/UPC - Case	50046677462883

Dimensional drawing

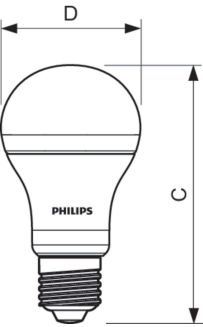


Product	D	C
LEDBulb 7-40W E27 3000K 100-240V A19 MX	60 mm	110 mm

Photometric data

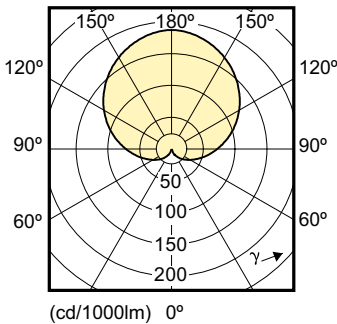

Light Distribution Diagram - LEDBulb 7-40W E27 3000K 100-240V A19 MX

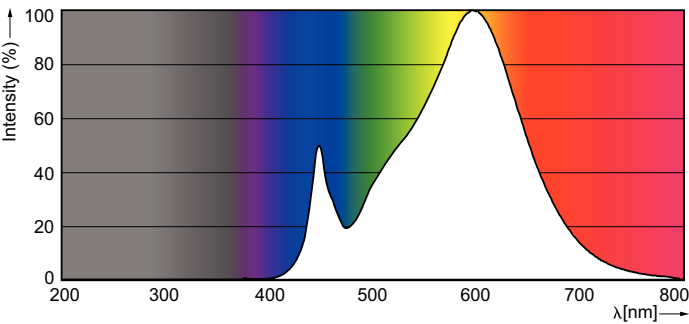

Spectral Power Distribution Colour - LEDBulb 7-40W E27 3000K 100-240V A19 MX

