



# Standard LED bulbs

## Standard LEDBulb 9-60W E27 3000K W A19 3PK/4

Standard LED bulbs are compatible with existing fixtures with a E27 holder and are designed for retrofit replacement of incandescent, halogen and energy saving bulbs. They deliver huge energy savings and minimize maintenance costs. The Standard LED bulb is the perfect bulb for your basic lighting needs. It provides the beautiful light and performance you expect from the LED technology at an affordable price.

### Product data


General Information		Power Consumption	
Cap-Base	E27 [E27]	Starting Time (Nom)	0.5 s
Nominal lifetime	25,000 hour(s)	Warm-up time to 60% light	0.5 s
Switching Cycle	50,000	Power Factor (Fraction)	0.92
Lighting Technology	LED	Voltage (Nom)	100-240 V
EU RoHS compliant	Yes	Temperature	
Light Technical		T-Case Maximum (Nom)	80 °C
Color Code	830 [CCT of 3000K]	Controls and Dimming	
Beam Angle (Nom)	150 degree(s)	Dimmable	No
Luminous Flux	806 lm	Mechanical and Housing	
Color Designation	White (WH)	Bulb Finish	Frosted
Correlated Color Temperature (Nom)	3000 K	Bulb Shape	A19 [A 19mm]
Luminous Efficacy (rated) (Nom)	89.56 lm/W	Product Data	
Color Consistency	ANSI	Order product name	LEDBulb 9-60W E27 3000K W A19 3PK/4
Color rendering index (CRI)	80	Full product name	Standard LEDBulb 9-60W E27 3000K W A19 3PK/4
LLMF At End Of Nominal Lifetime (Nom)	70 %	Full product code	871869665792800
Operating and Electrical			
Line Frequency	50 to 60 Hz		
Input Frequency	50 to 60 Hz		

Standard LED bulbs

Order code	65792800
Material Nr. (12NC)	929001195399
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8718696657928


Numerator - Packs per outer box	4
EAN/UPC - Case	8718696657935

Dimensional drawing

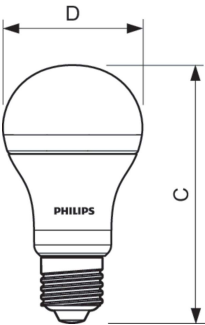


Product	D	C
LEDBulb 9-60W E27 3000K W A19 3PK/4	60 mm	110 mm

Photometric data



Light Distribution Diagram - LEDBulb 9-60W E27 3000K W A19 3PK/4

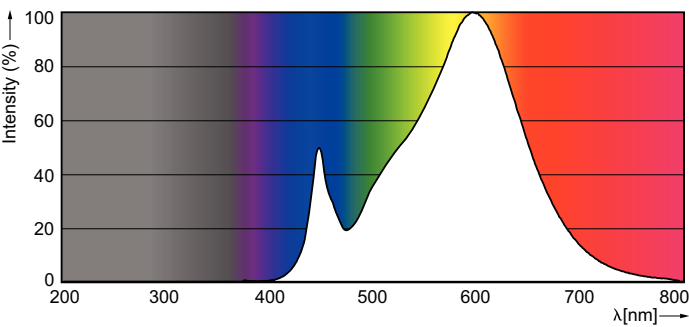

Spectral Power Distribution Colour - LEDBulb 9-60W E27 3000K W A19 3PK/4

