



Standard LED bulbs

Standard LEDBulb 9.5-75W E27 3000K W A19 MX

Standard LED bulbs are compatible with existing fixtures with a E27 holder and are designed for retrofit replacement of incandescent, halogen and energy saving bulbs. They deliver huge energy savings and minimize maintenance costs. The Standard LED bulb is the perfect bulb for your basic lighting needs. It provides the beautiful light and performance you expect from the LED technology at an affordable price.

Product data

General Information	
Cap-Base	E27 [E27]
Nominal lifetime	25,000 hour(s)
Switching Cycle	50,000
Lighting Technology	LED
EU RoHS compliant	Yes
Light Technical	
Color Code	830 [CCT of 3000K]
Beam Angle (Nom)	150 degree(s)
Luminous Flux	1,055 lm
Color Designation	White (WH)
Correlated Color Temperature (Nom)	3000 K
Luminous Efficacy (rated) (Nom)	111.05 lm/W
Color Consistency	ANSI
Color rendering index (CRI)	80
LLMF At End Of Nominal Lifetime (Nom)	70 %
Operating and Electrical	
Line Frequency	50 to 60 Hz
Input Frequency	50 to 60 Hz
Power Consumption	9.5 W


Wattage Equivalent		75 W
Starting Time (Nom)		0.5 s
Warm-up time to 60% light		0.5 s
Power Factor (Fraction)		0.92
Voltage (Nom)		100-240 V
Temperature		
T-Case Maximum (Nom)		80 °C
Controls and Dimming		
Dimmable		No
Mechanical and Housing		
Bulb Finish		Frosted
Bulb Shape		A19 [A 19mm]
Product Data		
Order product name		LEDBulb 9.5-75W E27 3000K W A19 MX
Full product name		Standard LEDBulb 9.5-75W E27 3000K W A19 MX
Order code		929001195541
Material Nr. (12NC)		929001195541

Standard LED bulbs

Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	046677462925
Numerator - Packs per outer box	6


EAN/UPC - Case	50046677462920
----------------	----------------

Dimensional drawing




Product	D	C
LEDBulb 9.5-75W E27 3000K W A19 MX	60 mm	110 mm

Photometric data

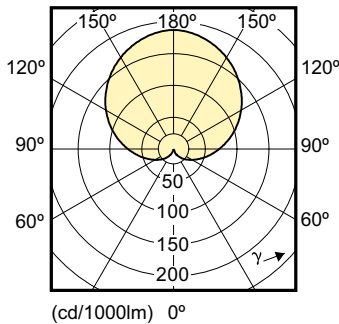

Light Distribution Diagram - LEDBulb 9.5-75W E27 3000K W A19 MX

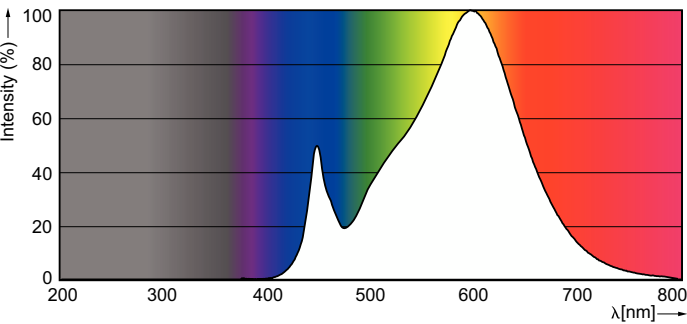

Spectral Power Distribution Colour - LEDBulb 9.5-75W E27 3000K W A19 MX

