



CorePro LED PLC

CorePro LED PLC LED PLC 6.5W 830 2P G24d-2

Philips CorePro LED PLC is the ideal uplamping solution for downlights in a wide range of general lighting applications. It integrates a LED light source into a traditional fluorescent form factor to offer superb energy savings over a lifetime that's twice as long as fluorescent alternatives.

Product data

General Information		Voltage (Nom)	
Cap base	G24D-2 [G24d-2]	220-240 V	
Nominal lifetime (nom.)	30000 h	Temperature	
Switching cycle	50000X	T ambient (max.)	35 °C
B50L70	30000 h	T ambient (min.)	-20 °C
Light Technical		T storage (max.)	65 °C
Colour code	830 [CCT of 3,000 K]	T storage (min.)	-40 °C
Luminous flux (nom.)	650 lm	T-Case maximum (nom.)	65 °C
Luminous flux (rated) (nom.)	650 lm	Controls and Dimming	
Correlated colour temperature (nom.)	3000 K	Dimmable	No
Colour consistency	<6	Mechanical and Housing	
Color rendering index (nom.)	83	Product length	100 mm
LLMF at end of nominal lifetime (nom.)	70 %	Approval and Application	
Operating and Electrical		Energy efficiency label (EEL)	A+
Input frequency	50 to 60 Hz	Energy-saving product	Yes
Power (Rated) (Nom)	6.5 W	Approval marks	CE marking RoHS compliance KEMA Keur certificate
Lamp current (max.)	35 mA	Energy Consumption kWh/1000 h	9 kWh
Lamp current (min.)	25 mA		
Starting time (nom.)	0.5 s		
Warm-up time to 60% light (nom.)	0.5 s		
Power factor (nom.)	0.9		


CorePro LED PLC

Product Data

Full product code	871869667003300
Order product name	CorePro LED PLC LED PLC 6.5W 830 2P G24d-2
EAN/UPC – product	8718696670033
Order code	67003300
Numerator – quantity per pack	1

Numerator – packs per outer box	10
Material no. (12NC)	929001201408
Net weight (piece)	0.080 kg


Dimensional drawing



LEDtube PLC 6.5W G24d-2/830 2P



Product	D1	D2	A1	A2	A3
CorePro LED PLC LED PLC 6.5W 830 2P G24d-2	24.3 mm	28.4 mm	105.8 mm	125 mm	147.6 mm

Photometric data





General Information 11 Photo Lighting 11 Page 117

LEDtube PLC 100mm 7W G24D-2 830 650lm

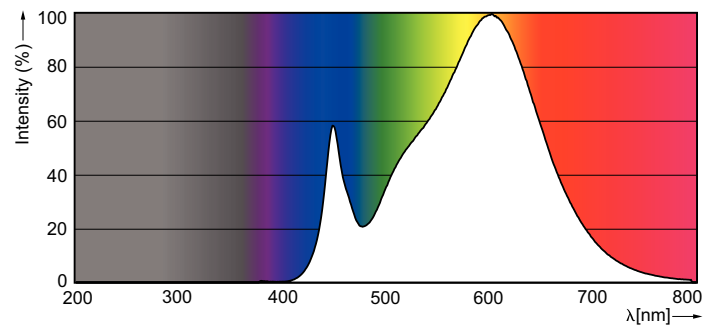



CorePro LED PLC

Lifetime

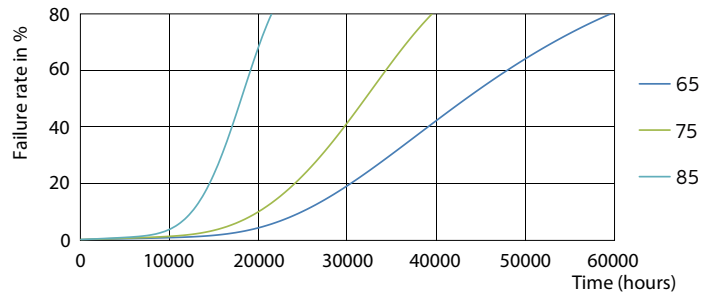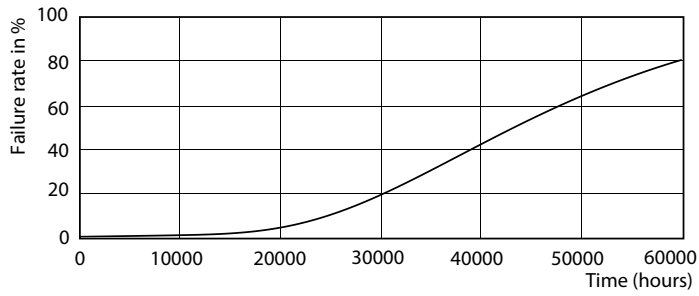


LEDtube PLC 100mm 7W G24D-2 830 650lm

LEDtube PLC 100mm 7W G24D-2 830 650lm

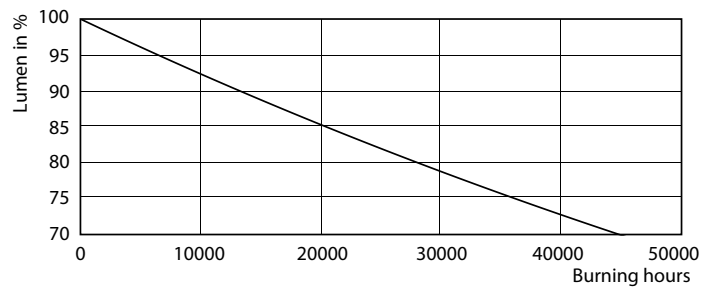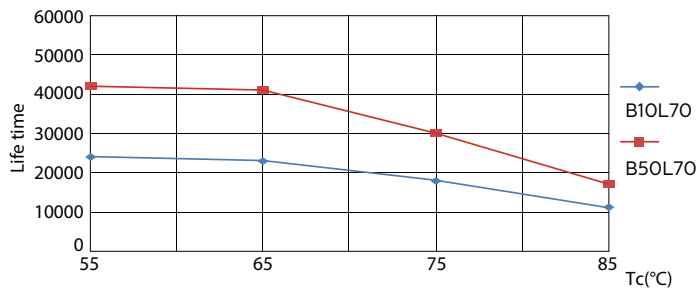

LEDtube PLC 100mm 7W G24D-2 830 650lm

LEDtube PLC 100mm 7W G24D-2 830 650lm

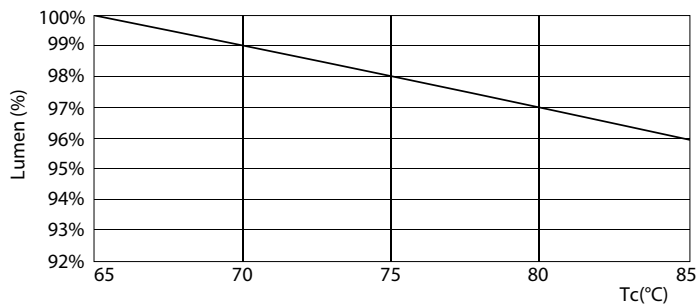

LEDtube PLC 100mm 7W G24D-2 830 650lm

CorePro LED PLC

