



CorePro LED PLC 2P

LED PLC 6.5W 840 2P G24d-2

CorePro LED PLC 2P 将 LED 光源融入到传统的荧光灯外形中。这款产品是升级普通照明应用中的灯泡的理想解决方案：它满足了基本的照明要求，可以节约大量的能源，属于环保产品。

产品数据

一般信息	
底座	G24d-2
标称使用寿命	30,000 小时
切换循环	50,000
照明技术	LED
符合欧盟 RoHS 规范	是
灯技术	
颜色代码	840 [CCT of 4000K]
光束角度 (标称)	120 °
光通量	700 lm
颜色名称	冷白色 (CW)
相关色温 (标称)	4000 K
光效 (额定) (标称)	107.00 lm/W
颜色一致性	<6
显色指数 (CRI)	83
标称使用寿命结束时灯的光通维持率 (标称)	70 %
操作和电气	
纹频率	50 to 60 Hz
输入频率	50 至 60 Hz
功耗	6.5 W
灯具电流 (最大)	35 mA
灯具电流 (最小)	25 mA


启动时间 (标称)	0.5 s
60% 灯光下的预热时间	0.5 s
功率系数 (小数)	0.9
电压 (标称)	220-240 V
温度	
环境温度范围	-20 °C 至 35 °C
最大外壳温度 (标称)	65 °C
控制和调光	
可调光	否
机械和外壳	
产品长度	100 mm
灯泡外形	PL-C
审批和申请	
节能产品	是
批准标志	TUV CE 标志
能耗 kWh/1000 h	9 kWh
产品数据	
订单产品名称	LED PLC 6.5W 840 2P G24d-2
完整的产品名称	LED PLC 6.5W 840 2P G24d-2

CorePro LED PLC 2P

完整产品代码	871869667005700
订购代码	929001201508
材料编号 (12NC)	929001201508
计算器 - 每包数量	1
EAN/UPC - 产品/箱	8718696670057


计算器 - 每个外包装箱中的包数	10
EAN/UPC - 案例	8718696670064

二维绘图




Product	D1	D2	A1	A2	A3
LED PLC 6.5W 840 2P G24d-2	24.3 mm	28.4 mm	105.8 mm	125 mm	147.6 mm


光度数据



General uniform lighting - LED PLC 6.5W 840 2P G24d-2


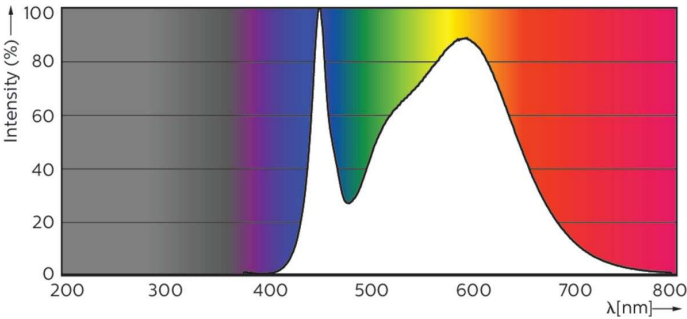


Spectral Power Distribution Colour - LED PLC 6.5W 840 2P G24d-2





Light Distribution Diagram - LED PLC 6.5W 840 2P G24d-2

寿命

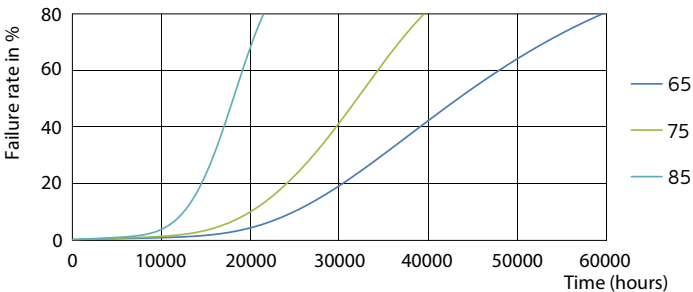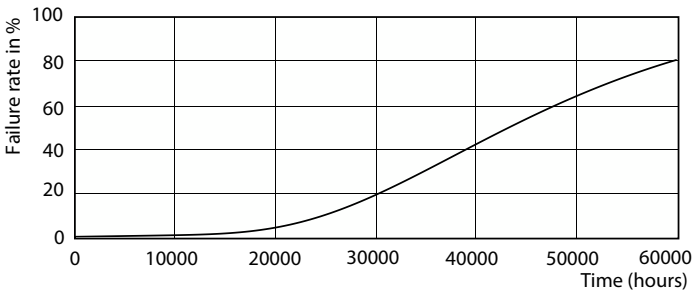


Life Expectancy Diagram - LED PLC 6.5W 840 2P G24d-2

Life Expectancy Diagram - LED PLC 6.5W 840 2P G24d-2

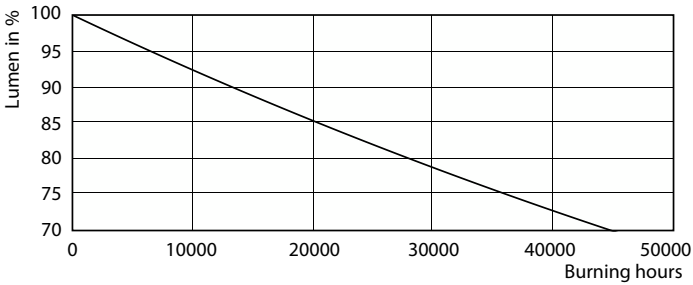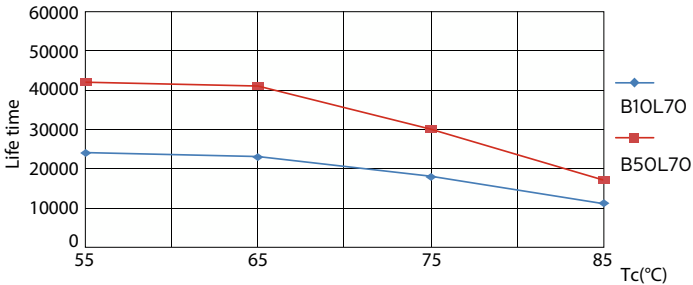

Life Expectancy Diagram - LED PLC 6.5W 840 2P G24d-2

Lumen Maintenance Diagram - LED PLC 6.5W 840 2P G24d-2

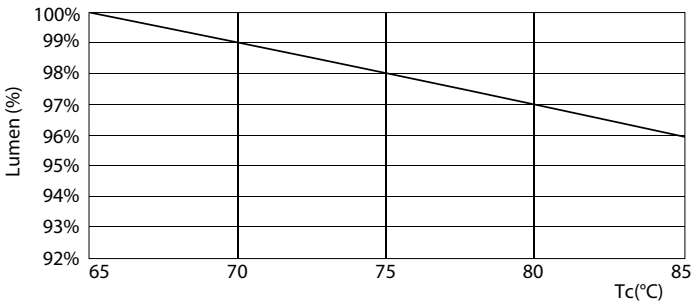

Lumen Maintenance Diagram - LED PLC 6.5W 840 2P G24d-2

