



CorePro LEDcandle

CorePro LEDcandle ND 3.5-25W E14 840 B35 FR

The frosted CorePro LEDcandle is designed for retrofit replacement of incandescent lamps. It is compatible with fixtures with an E14 holder and is an attractive product for chandeliers. LEDlamps deliver huge energy savings and minimize maintenance cost.

Product data

General Information	
Cap base	E14 [E14]
Red Dot Design Award winner mark	Reddot Design Award Winner 2016
Nominal lifetime (nom.)	15000 h
Switching cycle	50000X
Technical type	3.5-25W
Light Technical	
Colour code	841 [CCT of 4100K (841)]
Luminous flux (nom.)	290 lm
Luminous flux (rated) (nom.)	290 lm
Colour designation	Cool White (CW)
Correlated colour temperature (nom.)	4000 K
Luminous efficacy (rated) (nom.)	82.86 lm/W
Colour consistency	<6
Color rendering index (nom.)	80
LLMF at end of nominal lifetime (nom.)	70 %
Operating and Electrical	
Input frequency	50 to 60 Hz
Power (Rated) (Nom)	3.5 W
Lamp current (nom.)	35 mA
Wattage equivalent	25 W


Starting time (nom.)	0.5 s
Warm-up time to 60% light (nom.)	0.5 s
Power factor (nom.)	0.4
Voltage (Nom)	220-240 V
Temperature	
T-Case maximum (nom.)	75 °C
Controls and Dimming	
Dimmable	No
Mechanical and Housing	
Bulb finish	Frosted
Approval and Application	
Energy efficiency label (EEL)	A+
Energy Consumption kWh/1000 h	4 kWh
Product Data	
Full product code	871869654348100
Order product name	CorePro LEDcandle ND 3.5-25W E14 840 B35 FR
EAN/UPC – product	8718696543481
Order code	54348100

CorePro LEDcandle

Numerator – quantity per pack	1
Numerator – packs per outer box	10
Material no. (12NC)	929001205602

Net weight (piece)	0.040 kg
--------------------	----------



Dimensional drawing




LED ND 3.5-25W E14 840 B35 FR

Product	D	C
CorePro LEDcandle ND 3.5-25W E14 840 B35 FR	35 mm	106 mm

Photometric data

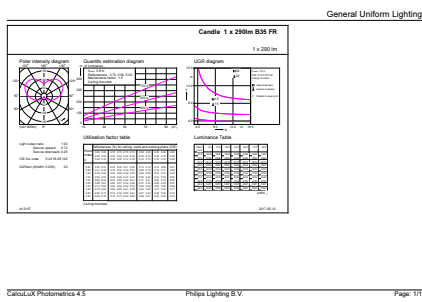

CorePro LEDcandle 25W E14 840 FR B35

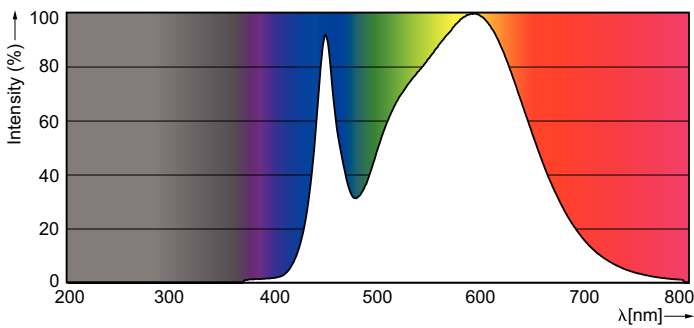

CorePro LEDcandle

Lifetime



LEDbulb 60W E14 827 FR B38



LEDbulb 60W E14 827 FR B38

