



MASTER VALUE LEDspot MV

MASTER LEDspotMV VLE D 3.5–25W GU10 827 40D

Delivering a warm, halogen-like accent beam, MASTER LEDspot MV is a perfect fit for spot lighting (track, corridors, lift lobbies, display cases and cabinets) in the hospitality industry. It is particularly suitable to public areas where the light is on 24/7, such as lobbies, corridors, stairwells. MASTER LEDspot MV delivers huge energy savings and minimizes maintenance cost without any compromise on brightness, enabling hospitality owners to achieve a return on their investment within one year. These LEDspots are compatible with most existing fixtures with a GU10 holder and designed as a retrofit replacement for halogen or incandescent spots. The dimmable versions drive further efficiencies, while helping to create the desired atmosphere.

Warnings and Safety

- Operating temperature range is between -20° C and 45° C ambient
- Only to apply in dry or damp locations and most of open fixtures with lamp-holders that offer sufficient space (10 mm free air space)
- Not intended for use with emergency light fixtures or exit lights

Product data

General Information	
Cap-Base	GU10 [GU10]
Nominal lifetime	35,000 hour(s)
Switching Cycle	50,000
Lighting Technology	LED
EU RoHS compliant	Yes

Light Technical	
Color Code	827 [CCT of 2700K]
Beam Angle (Nom)	40 degree(s)
Luminous Flux	230 lm
Luminous Intensity (Nom)	400 cd
Color Designation	Warm White (WW)
Correlated Color Temperature (Nom)	2700 K
Luminous Efficacy (rated) (Nom)	65.71 lm/W

MASTER VALUE LEDspot MV

Color Consistency	<6
Color rendering index (CRI)	80
LLMF At End Of Nominal Lifetime (Nom)	70 %
Luminous Flux in 90° Cone (Rated)	200 lm

Operating and Electrical

Line Frequency	50 to 60 Hz
Input Frequency	50 to 60 Hz
Power Consumption	3.5 W
Lamp Current (Nom)	19 mA
Starting Time (Nom)	0.5 s
Warm-up time to 60% light	0.5 s
Power Factor (Fraction)	0.8
Voltage (Nom)	220-240 V

Temperature

T-Case Maximum (Nom)	80 °C
----------------------	-------

Controls and Dimming

Dimmable	Yes
----------	-----

Mechanical and Housing

Bulb Shape	PAR16 [PAR 2 inch/50mm]
------------	-------------------------


Approval and Application

Energy Saving Product	Yes
Suitable For Accent Lighting	Yes
Energy Consumption kWh/1000 h	4 kWh

Product Data

Order product name	MAS LEDspotMV VLE D 3.5-25W GU10 827 40D
Full product name	MASTER LEDspotMV VLE D 3.5-25W GU10 827 40D
Full product code	871869656296300
Order code	56296300
Material Nr. (12NC)	929001215402
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8718696562963
Numerator - Packs per outer box	10
EAN/UPC - Case	8718696562970


Dimensional drawing




Product	D	C
MAS LEDspotMV VLE D 3.5-25W GU10 827 40D	50 mm	56 mm

MASTER VALUE LEDspot MV


Photometric data

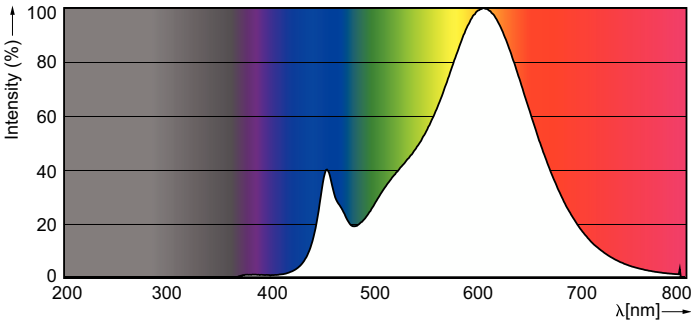

Spectral Power Distribution Colour - MAS LEDspotMV VLE D 3.5-25W GU10 827 40D



Light Distribution Diagram - MAS LEDspotMV VLE D 3.5-25W GU10 827 40D



General uniform lighting - MAS LEDspotMV VLE D 3.5-25W GU10 827 40D

