



CorePro Plastic LEDbulbs

CorePro LEDbulb ND 13-100W A60 E27 840

CorePro LEDbulbs are compatible with existing fixtures with an E27 or B22 holder and are designed for retrofit replacement of incandescent bulbs. They deliver huge energy savings and minimize maintenance cost.

Product data

General Information	
Cap-Base	E27 [E27]
Nominal lifetime	15,000 hour(s)
Switching Cycle	50,000
Lighting Technology	LED
EU RoHS compliant	Yes
Light Technical	
Color Code	840 [CCT of 4000K]
Beam Angle (Nom)	200 degree(s)
Luminous Flux	1,521 lm
Color Designation	Cool White (CW)
Correlated Color Temperature (Nom)	4000 K
Luminous Efficacy (rated) (Nom)	117.00 lm/W
Color Consistency	<6
Color rendering index (CRI)	80
LLMF At End Of Nominal Lifetime (Nom)	70 %
Operating and Electrical	
Line Frequency	50 to 60 Hz
Input Frequency	50 to 60 Hz


Power Consumption	13 W
Lamp Current (Nom)	120 mA
Starting Time (Nom)	0.5 s
Warm-up time to 60% light	0.5 s
Power Factor (Fraction)	0.5
Voltage (Nom)	220-240 V
Temperature	
T-Case Maximum (Nom)	88 °C
Controls and Dimming	
Dimmable	No
Mechanical and Housing	
Bulb Finish	Frosted
Bulb Shape	A60 [A 60mm]
Approval and Application	
Energy Saving Product	Yes
Suitable For Accent Lighting	No

CorePro Plastic LEDbulbs

Energy Consumption kWh/1000 h	13 kWh
Product Data	
Order product name	CorePro LEDbulb ND 13-100W A60 E27 840
Full product name	CorePro LEDbulb ND 13-100W A60 E27 840
Full product code	871869651030800
Order code	51030800



Material Nr. (12NC)	929001234902
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8718696510308
Numerator - Packs per outer box	10
EAN/UPC - Case	8718696510315

Dimensional drawing




Product	D	C
CorePro LEDbulb ND 13-100W A60 E27 840	60 mm	110 mm

Photometric data

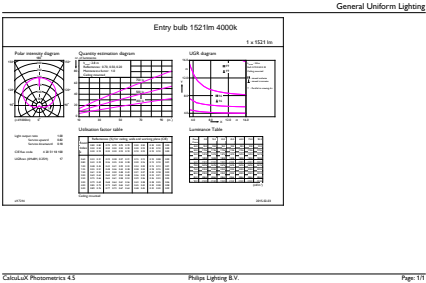

General uniform lighting - CorePro LEDbulb ND 13-100W A60 E27 840

Light Distribution Diagram - CorePro LEDbulb ND 13-100W A60 E27 840

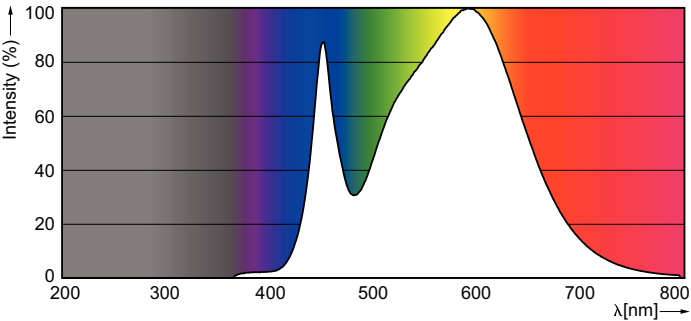

Spectral Power Distribution Colour - CorePro LEDbulb ND 13-100W A60 E27 840

CorePro Plastic LEDbulbs

