



# MASTER LEDspot LV

## MAS LEDspotLV VLE D 8-50W 827 MR16 24D

Delivering a warm, halogen-like accent beam, MASTER LEDspot LV is an ideal retrofit solution for spot and general lighting applications in the hospitality industry. It is particularly suited to public areas such as receptions, lobbies, corridors, stairwells and washrooms, where the light is on all the time. The robustly designed MASTER LEDspot offers a choice of beam angles for a clearly defined beam spread. There is no UV or IR in the beam, making it suitable for illuminating heat-sensitive objects (food, organic materials, paintings, etc.). The patented intelligent driver enables broad compatibility with existing electromagnetic and electronic halogen transformers. The dimmable versions drive further efficiencies, while helping to create the desired atmosphere.

### Product data

| General Information                  |                       |
|--------------------------------------|-----------------------|
| Cap base                             | GU5.3 [ GU5.3]        |
| Nominal lifetime (nom.)              | 25000 h               |
| Switching cycle                      | 50000X                |
| Technical type                       | 8-50W                 |
| Light Technical                      |                       |
| Colour code                          | 827 [ CCT of 2,700 K] |
| Beam Angle (Nom)                     | 24 °                  |
| Luminous flux (nom.)                 | 621 lm                |
| Luminous flux (rated) (nom.)         | 621 lm                |
| Luminous intensity (nom.)            | 2850 cd               |
| Colour designation                   | Warm White (WW)       |
| Rated beam angle                     | 24 °                  |
| Correlated colour temperature (nom.) | 2700 K                |
| Luminous efficacy (rated) (nom.)     | 77.63 lm/W            |
| Colour consistency                   | <6                    |

| Color rendering index (nom.)           | 80      |
|--|---------|
| LLMF at end of nominal lifetime (nom.) | 70 %    |
| Luminous Flux in 90° Cone (Rated)      | 621 lm  |
| Operating and Electrical               |         |
| Power (Rated) (Nom)                    | 8 W     |
| Lamp current (nom.)                    | 1000 mA |
| Wattage equivalent                     | 50 W    |
| Starting time (nom.)                   | 0.5 s   |
| Warm-up time to 60% light (nom.)       | 1 s     |
| Power factor (nom.)                    | 0.7     |
| Voltage (Nom)                          | 12 V    |
| Temperature                            |         |
| T-Case maximum (nom.)                  | 75 °C   |

# MASTER LEDspot LV

## Controls and Dimming

|          |     |
|----------|-----|
| Dimmable | Yes |
|----------|-----|

## Approval and Application

|                               |       |
|-------------------------------|-------|
| Energy efficiency label (EEL) | A+    |
| Energy-saving product         | Yes   |
| Suitable for accent lighting  | Yes   |
| Energy Consumption kWh/1000 h | 9 kWh |

## Product Data


|                   |                 |
|-------------------|-----------------|
| Full product code | 871869657201600 |
|-------------------|-----------------|

|                                 |  |
|---------------------------------|--|
| Order product name              | MAS LEDspotLV VLE D 8-50W 827 MR16 24D |
| EAN/UPC – product               | 8718696572016                          |
| Order code                      | 57201600                               |
| Numerator – quantity per pack   | 1                                      |
| Numerator – packs per outer box | 10                                     |
| Material no. (12NC)             | 929001241002                           |
| Net weight (piece)              | 0.045 kg                               |

## Warnings and Safety

- Operating temperature range is between -20° C and 45° C ambient
- Only to apply in dry or damp locations and most of open fixtures with lamp-holders that offer sufficient space (10 mm free air space)
- Not intended for use with emergency light fixtures or exit lights


## Dimensional drawing




MR16 12V 8.2W-50W 640lm24D 2700K GU5.3 D

| Product                                | D     | C     |
|--|-------|-------|
| MAS LEDspotLV VLE D 8-50W 827 MR16 24D | 50 mm | 50 mm |

## Photometric data

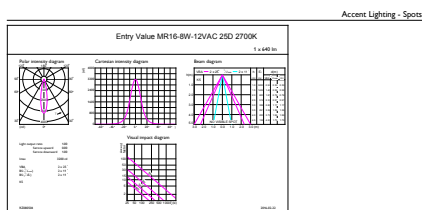

CalcLux Photometrics 4.5 Philips Lighting B.V. Page 1/7



LED Lamps, MAS LEDspotLV VLE D 8-50W MR16 GU5.3 827 24D

# MASTER LEDspot LV

## Photometric data

