



CorePro LEDlinear MV

CorePro LED linear R7S 118mm 14-100W 830 D

CorePro R7S is a retrofit replacement for traditional double-ended linear R7S lamps. Its 'light all around' design delivers light that is just like a halogen lamp. Within the range, you can choose dimmable products which have deep a dimming function that enables a cosy ambience when using a dimmable fixture.

Product data

General Information		Operating and Electrical	
Cap-Base	R7s	Line Frequency	50 to 60 Hz
Nominal lifetime	15,000 hour(s)	Input Frequency	50 to 60 Hz
Switching Cycle	50,000	Power Consumption	14 W
Lighting Technology	LED	Lamp Current (Nom)	74 mA
Flux measurement reference	Sphere	Wattage Equivalent	100 W
CE mark	Yes	Starting Time (Nom)	0.5 s
EU RoHS compliant	Yes	Warm-up time to 60% light	0.5 s
Light Technical		Power Factor (Fraction)	0.8
Color Code	830 [CCT of 3000K]	Voltage (Nom)	220-240 V
Luminous Flux	1,600 lm	Temperature	
Color Designation	White (WH)	T-Case Maximum (Nom)	90 °C
Correlated Color Temperature (Nom)	3000 K	Controls and Dimming	
Luminous Efficacy (rated) (Nom)	114.29 lm/W	Dimmable	Only with specific dimmers
Color Consistency	<6	Mechanical and Housing	
Color rendering index (CRI)	80	Bulb Shape	Linear
LLMF At End Of Nominal Lifetime (Nom)	70 %	Approval and Application	
Flickering value (PstLM) - Flickering value as per EN 61000-3-3	1	Energy Efficiency Class	E
Stroboscopic effect visibility measure (SVM)	0.4	Energy Saving Product	Yes

CorePro LEDlinear MV


Suitable For Accent Lighting	No
Energy Consumption kWh/1000 h	14 kWh
EPREL Registration Number	465216
EyeComfort	Yes
Application Conditions	
can it be used in closed luminaires	No
Product Data	
Order product name	CorePro R7S 118mm 14-100W 830 D
Full product name	CorePro LED linear R7S 118mm 14-100W 830 D

Full product code	871869657879700
Order code	57879700
Material Nr. (12NC)	929001243702
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8718696578797
Numerator - Packs per outer box	10
EAN/UPC - Case	8718696578803


Dimensional drawing

Product	D	C
CorePro R7S 118mm 14-100W 830 D	29 mm	118 mm

Photometric data

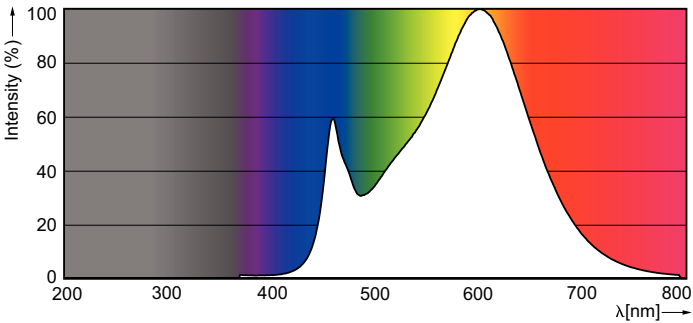


Spectral Power Distribution Colour - CorePro R7S 118mm 14-100W 830 D



General uniform lighting - CorePro R7S 118mm 14-100W 830 D

Photometric data



Light Distribution Diagram - CorePro R7S 118mm 14-100W 830 D

