



CorePro LEDlinear MV



CorePro R7S 118mm 14-100W 830 D

CorePro R7S is a retrofit replacement for traditional double-ended linear R7S lamps. Its 'light all around' design delivers light just like a halogen lamp. Within the range you can choose dimmable products which have deep dimming function that enables a cozy ambience when using a dimmable fixture.

Product data

General Information	
Cap-Base	R7s
Nominal lifetime	15,000 hour(s)
Switching Cycle	50,000
Lighting Technology	LED
Flux measurement reference	Sphere
CE mark	Yes
EU RoHS compliant	Yes
Light Technical	
Color Code	830 [CCT of 3000K]
Luminous Flux	1,600 lm
Color Designation	White (WH)
Correlated Color Temperature (Nom)	3000 K
Luminous Efficacy (rated) (Nom)	114.29 lm/W
Color Consistency	<6
Color rendering index (CRI)	80
LLMF At End Of Nominal Lifetime (Nom)	70 %
Flickering value (PstLM) - Flickering value as per	1
EN 61000-3-3	
Stroboscopic effect visibility measure (SVM)	0.4

Operating and Electrical	
Line Frequency	50 to 60 Hz
Input Frequency	50 to 60 Hz
Power Consumption	14 W
Lamp Current (Nom)	74 mA
Wattage Equivalent	100 W
Starting Time (Nom)	0.5 s
Warm-up time to 60% light	0.5 s
Power Factor (Fraction)	0.8
Voltage (Nom)	220-240 V
Temperature	
T-Case Maximum (Nom)	90 ℃
Controls and Dimming	
Dimmable	Only with specific dimmers
Mechanical and Housing	
Bulb Shape	Linear
Approval and Application	
Energy Efficiency Class	E
Energy Saving Product	Yes

Datasheet, 2024, March 14 data subject to change

CorePro LEDlinear MV


Suitable For Accent Lighting	No	
Energy Consumption kWh/1000 h	14 kWh	
EPREL Registration Number	465216	
EyeComfort	Yes	
Application Conditions		
can it be used in closed luminaires	No	
Product Data		
Order product name	CorePro R7S 118mm 14-100W 830 D	

Full product name	CorePro R7S 118mm 14-100W 830 D
Full product code	871869657879700
Order code	929001243702
Material Nr. (12NC)	929001243702
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8718696578797
Numerator - Packs per outer box	10
EAN/UPC - Case	8718696578803

Dimensional drawing

Product	D	c
CorePro R7S 118mm 14-100W 830 D	29 mm	118 mm

Photometric data

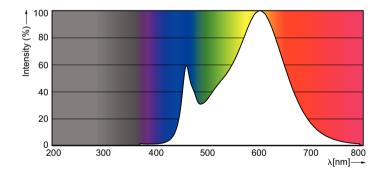




Spectral Power Distribution Colour - CorePro R7S 118mm 14-100W 830 D

General uniform lighting - CorePro R7S 118mm 14-100W 830 D

CorePro LEDlinear MV

Photometric data



Light Distribution Diagram - CorePro R7S 118mm 14-100W 830 D



© 2024 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.