



SceneSwitch LED candles and lusters

LED SSW 40W B38 E14 WW CL ND 2CT/4

Some situations call for cool light, others benefit from the ambiance of a warm cozy glow. With Philips SceneSwitch LED candles and lusters you can have different light settings from just one lamp. And you don't need a dimmer! Optimize your lighting for relaxing, hobbies, recreation or working. Simply at the flick of a switch. And that's your existing switch! No extra installation is required.

Product data

General Information		
Cap-Base	E14 [E14]	
Nominal lifetime	15,000 hour(s)	
Switching Cycle	100,000	
Rated Lifetime (Hours)	15,000 hour(s)	
Lighting Technology	LED	
EU RoHS compliant	Yes	
Light Technical		
Color Code	827/825/822 [CCT of 2700K/2500K/2200K]	
Color Designation	Warm/Extra Warm/Very Warm	
Luminous Efficacy (rated) (Nom)	85.00 lm/W	
Color Consistency	<6	
Color rendering index (CRI)	80	
LLMF At End Of Nominal Lifetime (Nom)	70 %	
Operating and Electrical		
Line Frequency	50 to 60 Hz	
Input Frequency	50 to 60 Hz	
Power Consumption	2 4 5.5 W	

Lamp Current (Nom)	50 mA
Wattage Equivalent	40 W
Starting Time (Nom)	0.5 s
Warm-up time to 60% light	0.5 s
Power Factor (Fraction)	0.5
Voltage (Nom)	220-240 V
Temperature	
T-Case Maximum (Nom)	95 ℃
Controls and Dimming	
Dimmable	No
Mechanical and Housing	
Bulb Finish	Clear
Bulb Shape	B38
Approval and Application	
Energy Consumption kWh/1000 h	6 kWh

Datasheet, 2023, November 22 data subject to change

SceneSwitch LED candles and lusters


EyeComfort	Yes
Product Data	
Order product name	LED SSW 40W B38 E14 WW CL ND 2CT/4
Full product name	LED SSW 40W B38 E14 WW CL ND 2CT/4
Full product code	871869679618400
Order code	929001260898

Material Nr. (12NC)	929001260898
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8718696796184
Numerator - Packs per outer box	4
EAN/UPC - Case	8718696796191


Dimensional drawing

Product	D	С
LED SSW 40W B38 E14 WW CL ND 2CT/4	38 mm	113 mm

Photometric data



Spectral Power Distribution Colour - LED SSW 40W B38 E14 WW CL ND 2CT/4





General uniform lighting - LED SSW 40W B38 E14 WW CL ND 2CT/4

Light Distribution Diagram - LED SSW 40W B38 E14 WW CL ND 2CT/4

SceneSwitch LED candles and lusters

Lifetime

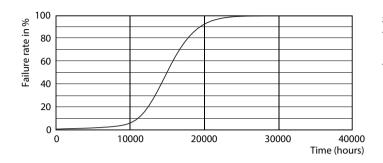

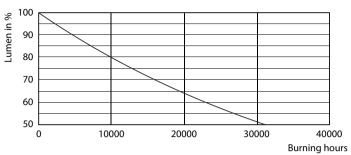

Life Expectancy Diagram - LED SSW 40W B38 E14 WW CL ND 2CT/4

Lumen Maintenance Diagram - LED SSW 40W B38 E14 WW CL ND 2CT/4



© 2023 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.