



LED SceneSwitch

9A19/LED/827-25-22/ND SSWG 120V 6/1

Philips SceneSwitch LED bulbs, adapt your room's ambiance to suit whatever you're doing, by changing the setting from cool day light to warm white, or dimming the brightness. All you need is your existing switch no extra installation is required.

Product data


General Information	
Cap-Base	E26 [Single Contact Medium Screw]
Nominal lifetime	15,000 hour(s)
Switching Cycle	100,000
Lighting Technology	LED
EU RoHS compliant	Yes
Light Technical	
Color Code	827/825/822 [CCT of 2700K/2500K/2200K]
Beam Angle (Nom)	300 degree(s)
Color Designation	Warm/Extra Warm/Very Warm
Luminous Efficacy (rated) (Nom)	88 lm/W
Color Consistency	<6
Color rendering index (CRI)	80
LLMF At End Of Nominal Lifetime (Nom)	70 %
Operating and Electrical	
Line Frequency	50 to 60 Hz
Input Frequency	50 to 60 Hz
Power Consumption	2 4 9 W
Lamp Current (Nom)	135 mA
Wattage Equivalent	60 W
Starting Time (Nom)	0.5 s
Warm-up time to 60% light	0.5 s

Power Factor (Fraction)	0.6
Voltage (Nom)	120 V
Temperature	
T-Case Maximum (Nom)	176 °F
Controls and Dimming	
Dimmable	No
Mechanical and Housing	
Bulb Finish	Frosted
Bulb Shape	A19 [A 19mm]
Approval and Application	
Suitable For Accent Lighting	No
Energy Consumption kWh/1000 h	- kWh
Product Data	
Order product name	9A19/LED/827-25-22/ND SSWG 120V
Full product name	9A19/LED/827-25-22/ND SSWG 120V 6/1
Order code	464965
Material Nr. (12NC)	929001261304
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	046677464967

LED SceneSwitch



Numerator - Packs per outer box	6
EAN/UPC - Case	50046677464962

Dimensional drawing



Product	D	C
9A19/LED/827-25-22/ND SSWG 120V	2-7/16 inch	4-3/8 inch

Photometric data

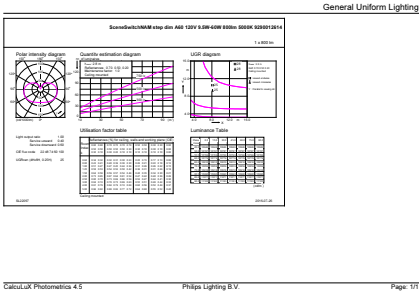

Spectral Power Distribution Colour - 9A19/LED/827-25-22/ND SSWG 120V

General uniform lighting - 9A19/LED/827-25-22/ND SSWG 120V

