



# LED SceneSwitch

## 9A19/LED/850/ND SSDL 120V

Philips SceneSwitch LED bulbs, adapt your room's ambiance to suit whatever you're doing, by changing the setting from cool day light to warm white, or dimming the brightness. All you need is your existing switch no extra installation is required.

### Product data

General Information	
Cap-Base	E26 [Single Contact Medium Screw]
Nominal lifetime	15,000 hour(s)
Switching Cycle	100,000
Lighting Technology	LED
EU RoHS compliant	Yes

Light Technical	
Color Code	850 [CCT of 5000K]
Beam Angle (Nom)	300 degree(s)
Color Designation	Daylight
Correlated Color Temperature (Nom)	5000 K
Luminous Efficacy (rated) (Nom)	88.00 lm/W
Color Consistency	<6
Color rendering index (CRI)	80
LLMF At End Of Nominal Lifetime (Nom)	70 %

Operating and Electrical	
Line Frequency	50 to 60 Hz
Input Frequency	50 to 60 Hz
Power Consumption	13.9 W
Lamp Current (Nom)	130 mA
Wattage Equivalent	60 W
Starting Time (Nom)	0.5 s

Warm-up time to 60% light	0.5 s
Power Factor (Fraction)	0.6
Voltage (Nom)	120 V

Temperature	
T-Case Maximum (Nom)	80 °C

Controls and Dimming	
Dimmable	No

Mechanical and Housing	
Bulb Finish	Frosted
Bulb Shape	A19 [A 19mm]


Approval and Application	
Suitable For Accent Lighting	No
Energy Consumption kWh/1000 h	- kWh

Product Data	
Order product name	9A19/LED/850/ND SSDL 120V
Full product name	9A19/LED/850/ND SSDL 120V
Order code	929001261404
Material Nr. (12NC)	929001261404
Numerator - Quantity Per Pack	1

LED SceneSwitch



EAN/UPC - Product/Case	046677464974
Numerator - Packs per outer box	6
EAN/UPC - Case	50046677464979

Dimensional drawing




Product	D	C
9A19/LED/850/ND SSDL 120V	61 mm	111 mm

Photometric data



Light Distribution Diagram - 9A19/LED/850/ND SSDL 120V

General uniform lighting - 9A19/LED/850/ND SSDL 120V

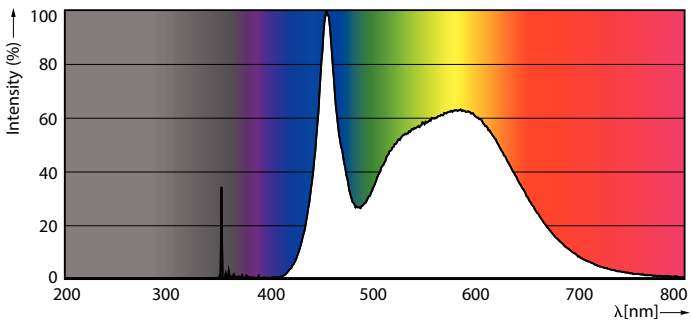

Spectral Power Distribution Colour

Lifetime



Life Expectancy Diagram - 9A19/LED/850/ND SSDL 120V



Lumen Maintenance Diagram - 9A19/LED/850/ND SSDL 120V

