



Classic filament LEDbulbs

LED A60 3-60W E27 CL ND 865

Featuring a classic heritage design, Classic filament LEDbulbs combine the familiar shapes of classic incandescent bulbs with the benefits of the long lasting LED technology. They deliver beautiful, decorative warm-white light while saving around 90% on energy costs compared with traditional light bulbs.

Product data

General Information			
Cap-Base	E27 [E27]	Power Consumption	3 W
Nominal lifetime	25,000 hour(s)	Lamp Current (Nom)	28 mA
Switching Cycle	20,000	Wattage Equivalent	60 W
Lighting Technology	LED	Starting Time (Nom)	0.5 s
EU RoHS compliant	Yes	Warm-up time to 60% light	1 s
		Power Factor (Fraction)	0.5
		Voltage (Nom)	220-240 V
Light Technical			
Color Code	865 [CCT of 6500K]	Temperature	
Luminous Flux	600 lm	T-Case Maximum (Nom)	50 °C
Color Designation	Cool Daylight	Controls and Dimming	
Correlated Color Temperature (Nom)	6500 K	Dimmable	No
Luminous Efficacy (rated) (Nom)	200.00 lm/W	Mechanical and Housing	
Color Consistency	<6	Bulb Finish	Clear
Color rendering index (CRI)	80	Bulb Shape	A60 [A 60mm]
LLMF At End Of Nominal Lifetime (Nom)	70 %	Approval and Application	
Operating and Electrical		Energy Saving Product	Yes
Line Frequency	50 to 60 Hz		
Input Frequency	50 to 60 Hz		

Classic filament LEDbulbs



Suitable For Accent Lighting	No
Energy Consumption kWh/1000 h	3 kWh
Product Data	
Order product name	LED A60 3-60W E27 CL ND 865
Full product name	LED A60 3-60W E27 CL ND 865
Full product code	871869665895600
Order code	929001262902

Material Nr. (12NC)	929001262902
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8718696658956
Numerator - Packs per outer box	10
EAN/UPC - Case	8718696658963

Dimensional drawing


Product	D	C
LED A60 3-60W E27 CL ND 865	60 mm	104 mm

Photometric data

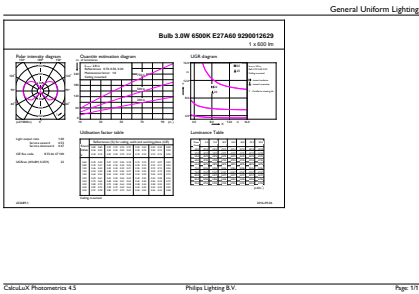

Spectral Power Distribution Colour - LED A60 3-60W E27 CL ND 865

General uniform lighting - LED A60 3-60W E27 CL ND 865



Light Distribution Diagram - LED A60 3-60W E27 CL ND 865

Classic filament LEDbulbs

