

LED BA11

4.5BA11/LEDFilament/820/CL-A/DIM 120V

Philips LED BA11 candles offer energy saving ambiance with the elegant effect of incandescent candles. These designs provides light in an omnidirectional manner, giving lighting designers a long life alternative to standard incandescent sources.


Product data

General Information		Power Factor (Nom)	
Base	E12 [Candelabra Screw]		0.7
EU RoHS compliant	Yes	Voltage (Nom)	120 V
Nominal Lifetime (Nom)	15000 h	Temperature	
Switching Cycle	20000X	T-Case Maximum (Nom)	100 °C
Technical Type	4.5-40W	Controls and Dimming	
Light Technical		Dimmable	Yes
Color Code	820 [CCT of 2000K]	Mechanical and Housing	
Initial lumen (Nom)	350 lm	Bulb Finish	Clear
Color Designation	Flame	Approval and Application	
Correlated Color Temperature (Nom)	2000 K	Energy Efficiency Label (EEL)	Not applicable
Luminous Efficacy (rated) (Nom)	77.00 lm/W	Energy Saving Product	Yes
Color Consistency	<6	Suitable For Accent Lighting	No
Color Rendering Index (Nom)	80	Energy Consumption kWh/1000 h	- kWh
LLMF At End Of Nominal Lifetime (Nom)	70 %	Product Data	
Operating and Electrical		Order product name	4.5BA11/LEDFilament/820/CL-A/DIM 120V
Input Frequency	50 to 60 Hz	EAN/UPC - Product	046677466527
Power (Rated) (Nom)	4.5 W	Order code	466524
Lamp Current (Nom)	50 mA	Numerator - Quantity Per Pack	1
Wattage Equivalent	40 W	Numerator - Packs per outer box	6
Starting Time (Nom)	0.5 s		
Warm Up Time to 60% Light (Nom)	0.5 s		

LED BA11

Material Nr. (12NC)	929001268704
Net Weight (Piece)	0.024 kg


Dimensional drawing




4.5BA11/LEDFilament/820/CL-A/DIM 120V

Product	D	C
4.5BA11/LEDFilament/820/CL-A/DIM 120V	35 mm	115 mm


Photometric data

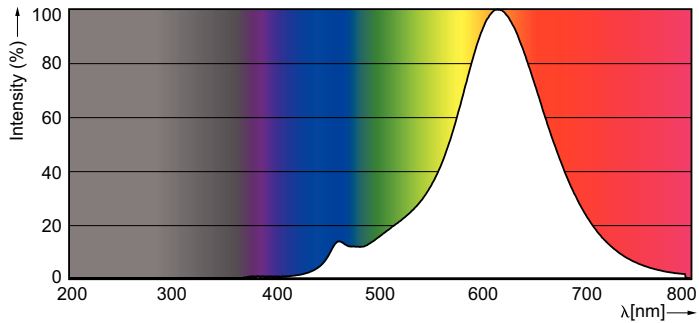

LEDlamps, LEDFilament Amber 2000K

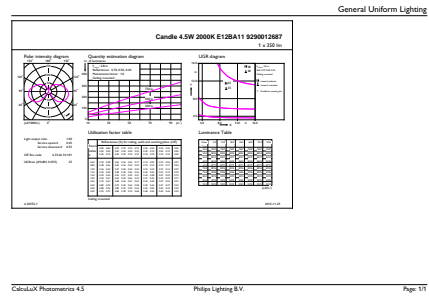

LEDCandle 4.5-40W BA38 E12 350lm CL



LEDCandle 4.5-40W BA38 E12 350lm CL

LED BA11

