

MASTER LEDtube EM/ Mains T8

MAS LEDtube 1200mm UO 16W 840 T8

The Philips MASTER LEDtube integrates a LED light source into a traditional fluorescent form factor. Its unique design creates a perfectly uniform visual appearance, which cannot be distinguished from traditional fluorescent. These T8 LED tubes are the right choice for absolute performance and are designed to stand up to everyday conditions. Unparalleled savings thanks to low energy consumption and an exceptionally long lifetime ensure this tube masters every demanding application.

Warnings and Safety

• NOTE: The overall energy efficiency and light distribution of any installation that uses these lamps will be determined by the design of the installation.

Product data

General Information				
Cap-Base G13 [Medium Bi-Pin Fluorescent]				
Nominal lifetime	50,000 hour(s)			
Switching Cycle	200,000			
Lighting Technology	LED			
EU RoHS compliant	Yes			
Light Technical				
Color Code	840 [CCT of 4000K]			
Beam Angle (Nom)	160 degree(s)			
Luminous Flux	2,500 lm			
Color Designation	Cool White (CW)			
Correlated Color Temperature (Nom)	4000 K			
Luminous Efficacy (rated) (Nom) 156.00 lm/W				

Color Consistency	<6			
Color rendering index (CRI)	83			
LLMF At End Of Nominal Lifetime (Nom) 70 %				
Operating and Electrical				
Line Frequency	50 to 60 Hz			
Input Frequency	50 to 60 Hz			
Power Consumption	16 W			
Lamp Current (Max)	75 mA			
Lamp Current (Min)	68 mA			
Starting Time (Nom)	0.5 s			
Warm-up time to 60% light	0.5 s			
Power Factor (Fraction)	0.9			
· · · · · · · · · · · · · · · · · · ·				

Datasheet, 2023, November 22 data subject to change


MASTER LEDtube EM/Mains T8

Voltage (Nom)	220-240 V			
Temperature				
Ambient temperature range	-20 °C to 35 °C			
T-Case Maximum (Nom)	55 ℃			
Controls and Dimming				
Dimmable	No			
Mechanical and Housing				
Product Length	1,200 mm			
Bulb Shape	Т8			
Approval and Application				
Energy Saving Product	Yes			
Approval Marks	TUV CE marking RoHS compliance KEMA Keur			

certificate


Energy Consumption kWh/1000 h	16 kWh				
Product Data					
Order product name	MAS LEDtube 1200mm UO 16W 840 T8				
Full product name	MAS LEDtube 1200mm UO 16W 840 T8				
Full product code	871869668738300				
Order code	929001297902				
Material Nr. (12NC)	929001297902				
Numerator - Quantity Per Pack	1				
EAN/UPC - Product/Case	8718696687383				
Numerator - Packs per outer box	10				
EAN/UPC - Case	8718696687390				

Dimensional drawing




Product	D1	D2	A1	A2	А3
MAS LEDtube 1200mm UO 16W	25.78 mm	28 mm	1,198.2 mm	1,205.3 mm	1,212.4 mm
840 T8					

Photometric data








Spectral Power Distribution Colour - MAS LEDtube 1200mm UO 16W 840 T8


MASTER LEDtube EM/Mains T8


Photometric data



Light Distribution Diagram - MAS LEDtube 1200mm UO 16W 840 T8

Lifetime

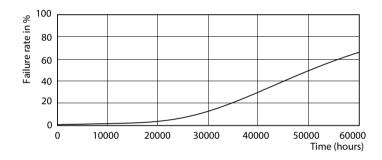

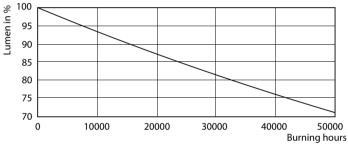

Life Expectancy Diagram - MAS LEDtube 1200mm UO 16W 840 T8

Lumen Maintenance Diagram - MAS LEDtube 1200mm UO 16W 840 T8



© 2023 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.