



# T8

## 7T8 LED/24-3500 IF 10/1

Our TLEDs are available in InstantFit (Type A / Type C) or MainsFit (Ballast bypass / Type B) versions. The InstantFit lamps work on a broad variety of ballasts and LED drivers. Only InstantFit has over 15,000 lamp & ballast combinations delivering even light output, energy savings and a long lifetime. Our MainsFit products feature a double-ended design, simplifying installation while a proprietary safety circuit minimizes a shock risk. Lamp sizes range from 2-foot to 8-foot and U-bend with a variety of lumen outputs.

### Product data

General Information	
Base	G13 [ Medium Bi-Pin Fluorescent]
EU RoHS compliant	Yes
Nominal Lifetime (Nom)	50000 h
Switching Cycle	50000X
Light Technical	
Color Code	835 [ CCT of 3500K]
Beam Angle (Nom)	180 °
Initial lumen (Nom)	1050 lm
Color Designation	White (WH)
Correlated Color Temperature (Nom)	3500 K
Luminous Efficacy (rated) (Nom)	150.00 lm/W
Color Consistency	<6
Color Rendering Index (Nom)	82
LLMF At End Of Nominal Lifetime (Nom)	70 %
Operating and Electrical	
Input Frequency	20000-120000 Hz
Power (Rated) (Nom)	7 W

Lamp Current (Max)	240 mA
Lamp Current (Min)	80 mA
Starting Time (Nom)	0.5 s
Warm Up Time to 60% Light (Nom)	0.1 s
Power Factor (Nom)	0.9
Voltage (Nom)	120-277, 347 V

Temperature	
T-Ambient (Max)	45 °C
T-Ambient (Min)	-20 °C
T-Storage (Max)	65 °C
T-Storage (Min)	-40 °C
T-Case Maximum (Nom)	50 °C

Controls and Dimming	
Dimmable	No

Mechanical and Housing	
Product Length	24 in

# T8

## Approval and Application


Energy Efficiency Label (EEL)	Not applicable
Energy Saving Product	Yes
Approbation Marks	UL certificate RoHS compliance DLC compliance
Energy Consumption kWh/1000 h	- kWh

## Product Data

Order product name	7T8 LED/24-3500 IF 10/1
--------------------	-------------------------

EAN/UPC - Product	046677472283
Order code	469288
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	10
Material Nr. (12NC)	929001310904
Net Weight (Piece)	0.090 kg
Model Number	9290013109



## Dimensional drawing

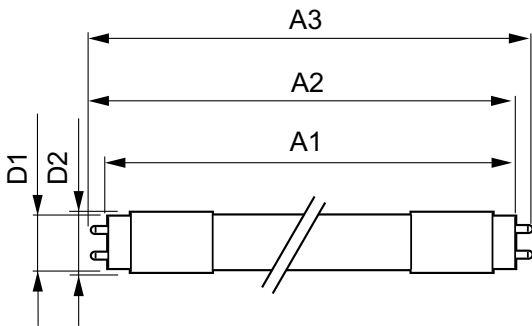

TLED 2ft 600mm 6W-17W 950lm 3500K G13 ND

Product	D1	D2	A1	A2	A3
7T8 LED/24-3500 IF 10/1	25.7 mm	26.3 mm	588.6 mm	595.7 mm	602.8 mm


## Photometric data



LEDtube 600mm 7W G13 835 1050lm


LEDtube 600mm 7W G13

Photometric data

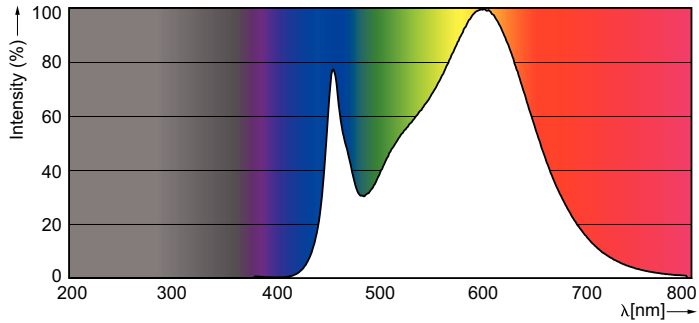


SDPO\_MLEDGA\_0056-Spectral Power distribution

Lifetime

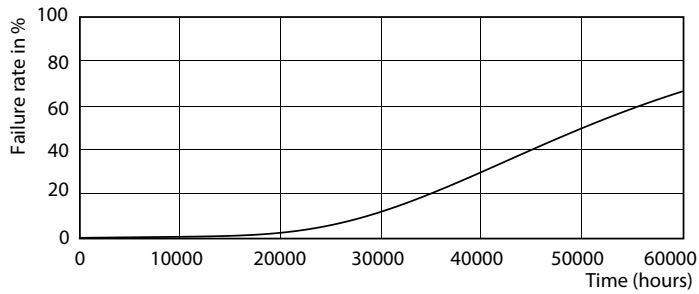

LEDtube 600mm 7W G13

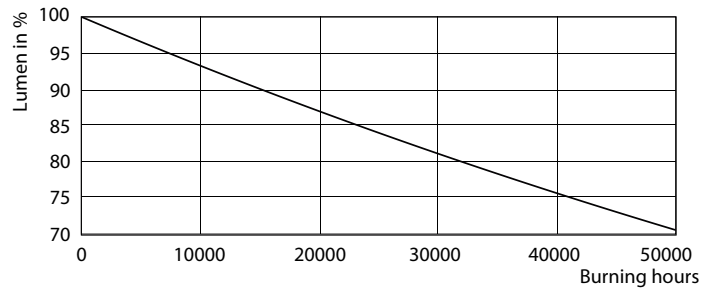

LEDtube 600mm 7W G13

