



PAR38 LED

14PAR38/LED/827/F25/DIM/ULW/120V 6/1FB

Philips PAR38 LED Single Optic Lamps with AirFlux Technology improves shopping experience with superior lighting aesthetics and optimal thermal efficiency in a sleek, lightweight design.

Product data

General Information	
Cap-Base	E26 [Single Contact Medium Screw]
Nominal Lifetime (Nom)	25000 h
Switching Cycle	25000X
Technical Type	14-120W

Light Technical	
Color Code	827 [CCT of 2700K]
Beam Angle (Nom)	25°
Luminous Flux (Nom)	1150 lm
Luminous Flux (Rated) (Nom)	1150 lm
Luminous Intensity (Nom)	5700 cd
Color Designation	Warm White (WW)
Rated Beam Angle	25°
Correlated Color Temperature (Nom)	2700 K
Luminous Efficacy (rated) (Nom)	82.00 lm/W
Color Consistency	<6
Color Rendering Index (Nom)	80
LLMF At End Of Nominal Lifetime (Nom)	70 %

Operating and Electrical	
Input Frequency	50 to 60 Hz
Power (Rated) (Nom)	14 W
Lamp Current (Nom)	120 mA

Wattage Equivalent	120 W
Starting Time (Nom)	0.5 s
Warm Up Time to 60% Light (Nom)	0.5 s
Power Factor (Nom)	0.9
Voltage (Nom)	120 V

Temperature	
T-Case Maximum (Nom)	70 °C

Controls and Dimming	
Dimmable	Yes

Approval and Application	
Suitable For Accent Lighting	Yes


Product Data	
Order product name	14PAR38/LED/827/F25/DIM/ULW/120V 6/1FB
EAN/UPC - Product	046677529505
Order code	929001318304
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	6
Material Nr. (12NC)	929001318304
Net Weight (Piece)	0.385 kg

PAR38 LED

Warnings and Safety

- Suitable for use in damp locations.
- Not for use in totally enclosed luminaires.
- CAUTION: Risk of electric shock - do not use where directly exposed to water.
- NOTES: This device complies with Part 18 of the FCC rule. This product may cause interference with other devices. If interference occurs, change the location of the products involved. This RFLD device complies with Canadian ICES-005


Dimensional drawing




Classic PAR38 120V 14-120W 1200lm 25D 27

Product	D	C
14PAR38/LED/827/F25/DIM/ULW/120V 6/1FB	122 mm	134 mm

Photometric data




14-120W E26 PAR38 25D 827 2700K



14-120W E26 PAR38 25D 827 2700K


PAR38 LED

Photometric data

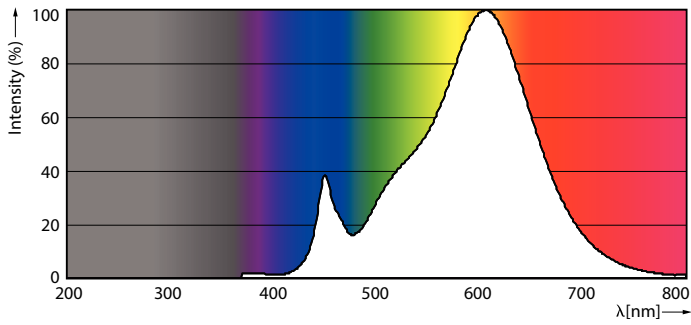


14-120W E26 PAR38

Lifetime

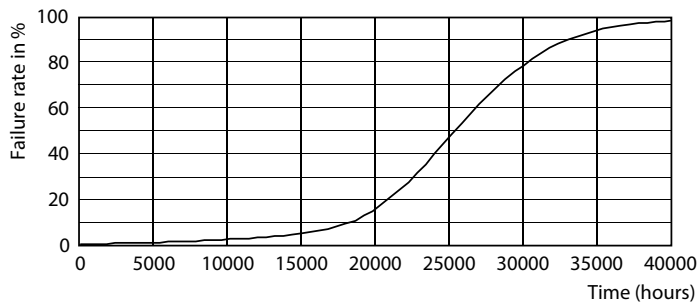

14-120W E26 PAR38

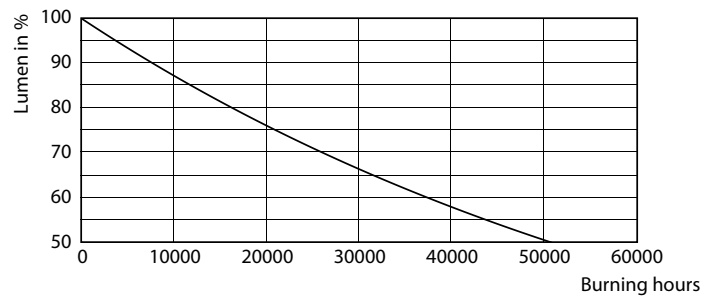

14-120W E26 PAR38

