



LED PAR30 S/L

10PAR30S/LED/830/F25/DIM/ULW/120V 6/1FB

Philips LED spots with a single optic beam, provide a clean beam that's free from shadows with beam angles from 15 and 40 degrees to suit every general lighting application.


Product data

General Information		Starting Time (Nom)	
Base	E26 [Single Contact Medium Screw]		0.5 s
EU RoHS compliant	Yes	Warm Up Time to 60% Light (Nom)	0.5 s
Nominal Lifetime (Nom)	25000 h	Power Factor (Nom)	0.9
Switching Cycle	25000X	Voltage (Nom)	120 V
Technical Type	10-75W		
Light Technical		Temperature	
Color Code	830 [CCT of 3000K]	T-Case Maximum (Nom)	70 °C
Beam Angle (Nom)	25 °		
Initial lumen (Nom)	850 lm	Controls and Dimming	
Luminous Intensity (Nom)	3300 cd	Dimmable	Yes
Color Designation	White (WH)		
Correlated Color Temperature (Nom)	3000 K	Mechanical and Housing	
Luminous Efficacy (rated) (Nom)	85.00 lm/W	Bulb Shape	PAR30S [PAR 3.75 inch/95mm Short]
Color Consistency	<6		
Color Rendering Index (Nom)	80	Approval and Application	
LLMF At End Of Nominal Lifetime (Nom)	70 %	Suitable For Accent Lighting	Yes
		Energy Consumption kWh/1000 h	- kWh
Operating and Electrical		Product Data	
Input Frequency	50 to 60 Hz	Order product name	10PAR30S/LED/830/F25/DIM/ULW/120V 6/1FB
Power (Rated) (Nom)	10 W	EAN/UPC - Product	046677529772
Lamp Current (Nom)	86 mA	Order code	529776
Wattage Equivalent	75 W	Numerator - Quantity Per Pack	1

LED PAR30 S/L

Numerator - Packs per outer box	6
Material Nr. (12NC)	929001320504
Net Weight (Piece)	0.220 kg



Dimensional drawing



Classic PAR30S 120V 9-75W 850lm 25D 3000

Product	D	C
10PAR30S/LED/830/F25/DIM/ULW/120V 6/1FB	94 mm	93 mm


Photometric data

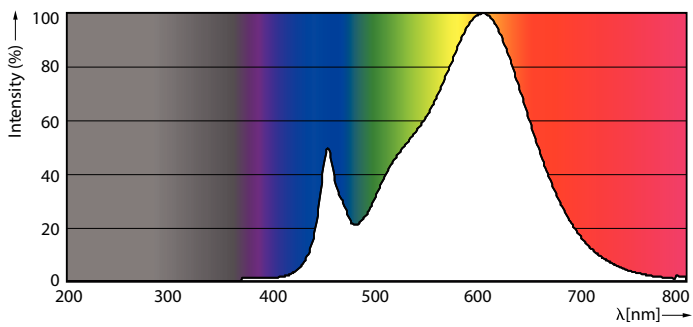

Standard Reference 01 Photometry 01 Page 07

10-75W E26 PAR30S


10-75W E26 PAR30S 25D 830 3000K



10-75W E26 PAR30S 25D 830 3000K

LED PAR30 S/L

Lifetime

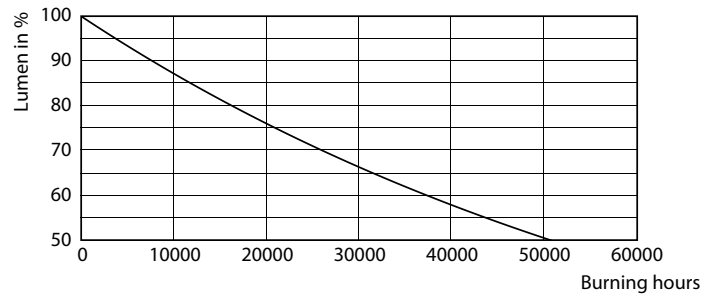

14-120W E26 PAR38

14-120W E26 PAR38

