



# LED PAR30 S/L

## 10PAR30S/LED/827/F40/DIM/ULW/120V 6/1FB

Philips LED spots with a single optic beam, provide a clean beam that's free from shadows with beam angles from 15 and 40 degrees to suit every general lighting application.

### Product data

General Information	
Base	E26 [ Single Contact Medium Screw]
Nominal Lifetime (Nom)	25000 h
Switching Cycle	25000X
Technical Type	10-75W

Light Technical	
Color Code	827 [ CCT of 2700K]
Beam Angle (Nom)	40 °
Initial lumen (Nom)	800 lm
Luminous Flux (Rated) (Nom)	800 lm
Luminous Intensity (Nom)	1600 cd
Color Designation	Warm White (WW)
Rated Beam Angle	40 °
Correlated Color Temperature (Nom)	2700 K
Luminous Efficacy (rated) (Nom)	80.00 lm/W
Color Consistency	<6
Color Rendering Index (Nom)	80
LLMF At End Of Nominal Lifetime (Nom)	70 %

Operating and Electrical	
Input Frequency	50 to 60 Hz
Power (Rated) (Nom)	10 W
Lamp Current (Nom)	86 mA

Wattage Equivalent	75 W
Starting Time (Nom)	0.5 s
Warm Up Time to 60% Light (Nom)	0.5 s
Power Factor (Nom)	0.9
Voltage (Nom)	120 V

Temperature	
T-Case Maximum (Nom)	70 °C


Controls and Dimming	
Dimmable	Yes

Approval and Application	
Suitable For Accent Lighting	Yes

Product Data	
Order product name	10PAR30S/LED/827/F40/DIM/ULW/120V 6/1FB
EAN/UPC - Product	046677529796
Order code	529792
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	6
Material Nr. (12NC)	929001320904
Net Weight (Piece)	0.220 kg

# LED PAR30 S/L


## Dimensional drawing



Classic PAR30S 120V 9-75W 800lm 40D 2700


Product	D	C
10PAR30S/LED/827/F40/DIM/ULW/120V 6/1FB	94 mm	93 mm

## Photometric data




© 2019 Philips Lighting B.V. All rights reserved. Page 10

10-75W E26 PAR30S 40D 827 2700K

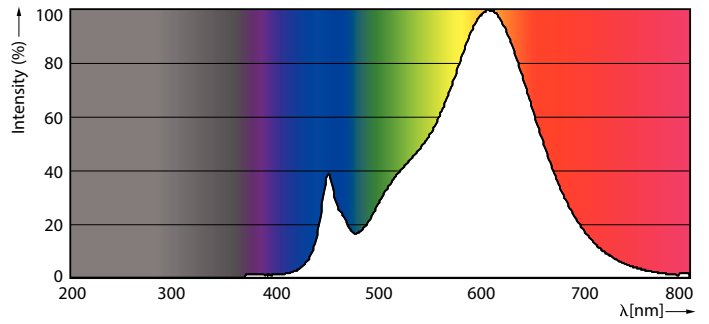


10-75W E26 PAR30S



10-75W E26 PAR30S 40D 827 2700K

# LED PAR30 S/L

## Lifetime

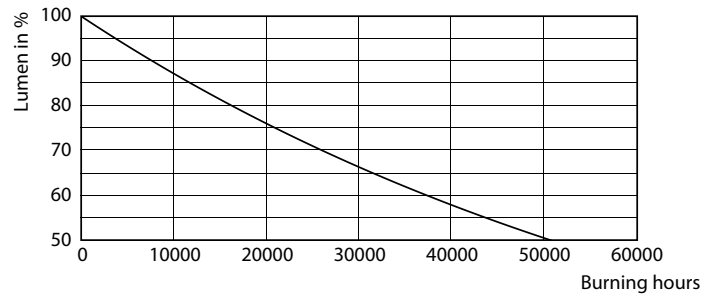

14-120W E26 PAR38

14-120W E26 PAR38

