



# MASTER LEDtube InstantFit HF T5

## MAS LEDtube HF 1200mm HO 26W 830 T5

Philips MASTER LEDtube InstantFit T5 integrates a LED light source into a traditional fluorescent form factor. Its unique design creates a perfectly uniform visual appearance which cannot be distinguished from traditional fluorescents. The Philips MASTER LEDtube InstantFit T5 is the ideal solution for customers who have higher light output requirements and want to maximise value over the lifetime. The full energy savings & longer lifetime result in attractive payback times and TCO benefits.

### Product data

General Information	
Cap base	G5 [ G5]
Nominal lifetime (nom.)	50000 h
Switching cycle	50000X
B50L70	50000 h

Light Technical	
Colour Code	830 [ CCT of 3,000 K]
Beam Angle (Nom)	160 °
Lamp Luminous Flux 25°C EL (Nom)	3700 lm
Lamp Luminous Flux (Nom)	3700 lm
Rated beam angle	160 °
Colour Temperature, horizontal (Nom)	3000 K
Colour consistency	<6
Colour Rendering Index,horiz (Nom)	83
LLMF at end of nominal lifetime (nom.)	70 %

Operating and Electrical	
Input frequency	35000-80000 Hz

Power (Rated) (Nom)	26 W
Lamp current (max.)	700 mA
Lamp current (min.)	450 mA
Starting time (nom.)	0.5 s
Warm-up time to 60% light (nom.)	0.5 s
Voltage (Nom)	50-60 V

Temperature	
T ambient (max.)	45 °C
T ambient (min.)	-20 °C
T storage (max.)	65 °C
T storage (min.)	-40 °C

Controls and Dimming	
Dimmable	No





  

Mechanical and Housing	
Product length	1200 mm




# MASTER LEDtube InstantFit HF T5

## Lifetime

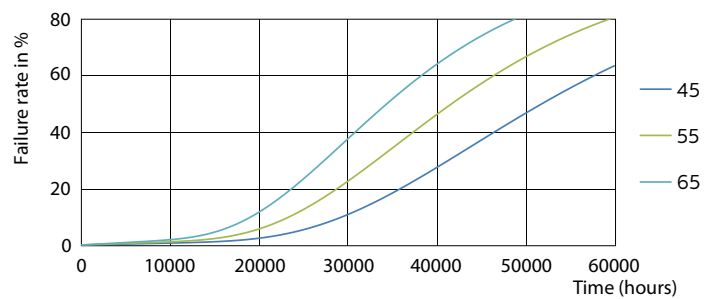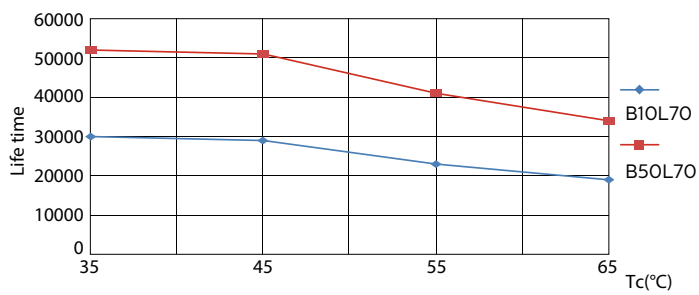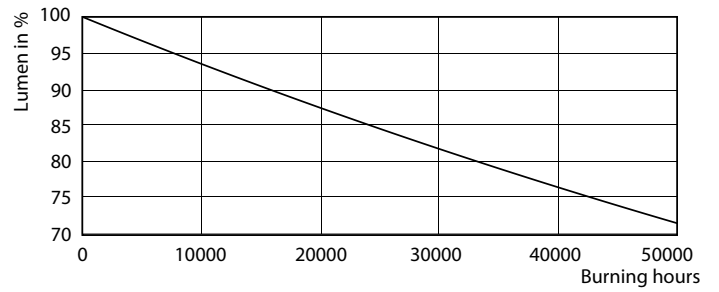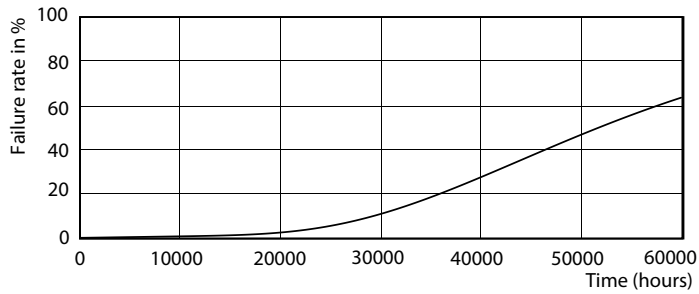

LEDtube 1200mm 26W G5 3900lm

LEDtube 1200mm 26W G5 3900lm

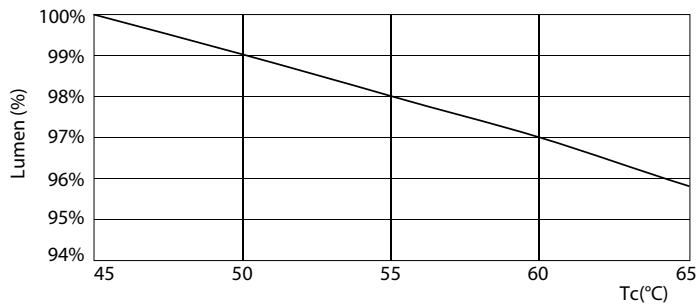

LEDtube 1200mm 26W G5 3900lm

