

CorePro LEDtube InstantFit T8

17T8 LED/48-5000 IF G 10/1

The CorePro LED Type A - Ballast Driven (Plug and Play) InstantFit TLED is a great LED solution suitable for replacing T8 fluorescent lamps, using an existing ballast. Specific lamps can also be used on Philips Xitanium driver for Type C applications.

Product data

General Information	
Cap-Base	G13 [Medium Bi-Pin Fluorescent]
Nominal Lifetime (Nom)	36000 h
Switching Cycle	50000X
B50L70	36000 h
Light Technical	
Color Code	850 [CCT of 5000K]
Beam Angle (Nom)	240 °
Luminous Flux (Nom)	2100 lm
Luminous Flux (Rated) (Nom)	2100 lm
Rated Beam Angle	240 °
Correlated Color Temperature (Nom)	5000 K
Color Consistency	<6
Color Rendering Index (Nom)	80
LLMF At End Of Nominal Lifetime (Nom)	70 %
Operating and Electrical	
Input Frequency	20000-120000 Hz
Power (Rated) (Nom)	17 W
Lamp Current (Max)	260 mA


Lamp Current (Min)	80 mA
Starting Time (Nom)	0.5 s
Warm Up Time to 60% Light (Nom)	0.5 s
Power Factor (Nom)	0.9
Voltage (Nom)	120-277, 347 V
Temperature	
T-Ambient (Max)	45 °C
T-Ambient (Min)	-20 °C
T-Storage (Max)	65 °C
T-Storage (Min)	-40 °C
T-Case Maximum (Nom)	60 °C
Controls and Dimming	
Dimmable	No
Mechanical and Housing	
Product Length	1200 mm
Approval and Application	
Energy Efficiency Label (EEL)	Not applicable

CorePro LEDtube InstantFit T8

Energy Saving Product	Yes
Approval Marks	UL certificate RoHS compliance
Product Data	
Order product name	17T8 LED/48-5000 IF G 10/1
EAN/UPC - Product	046677452414
Order code	929001343604

Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	10
Material Nr. (12NC)	929001343604
Net Weight (Piece)	0.215 kg


Dimensional drawing

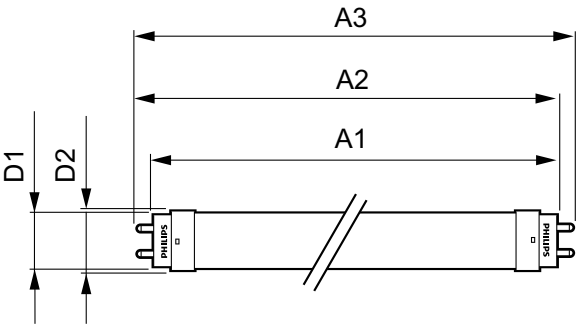


17T8 LED/48-5000 IF G 10/1

Product	D1	D2	A1	A2	A3
17T8 LED/48-5000 IF G 10/1	25.7 mm	28 mm	1198 mm	1205 mm	1212 mm


Photometric data

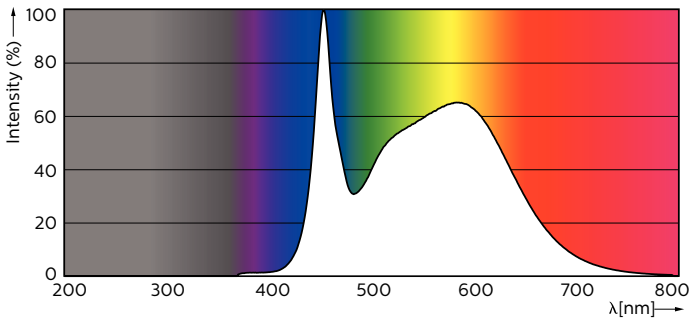

LEDtube 1200mm 17W G13 850 2100lm





LEDtube 1200mm 17W G13 2100lm



LEDtube 1200mm 17W G13 850 2100lm



CorePro LEDtube InstantFit T8

Lifetime

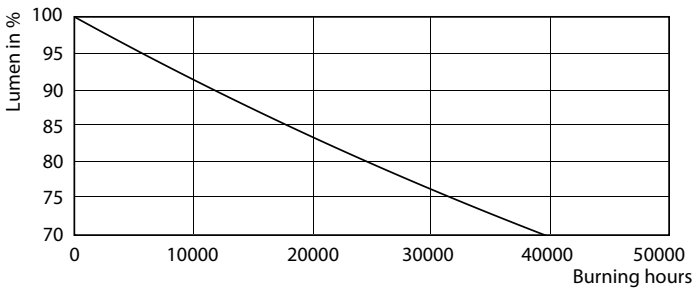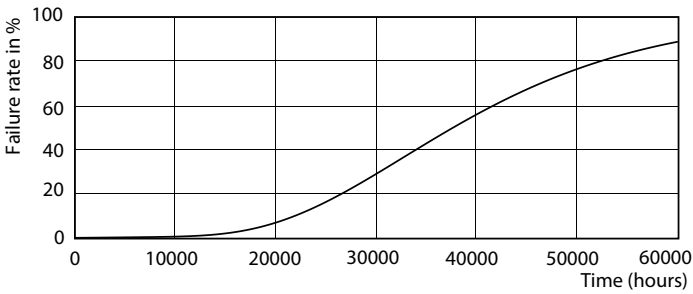


LEDtube 1200mm 17W G13 2100lm

LEDtube 1200mm 17W G13 2100lm

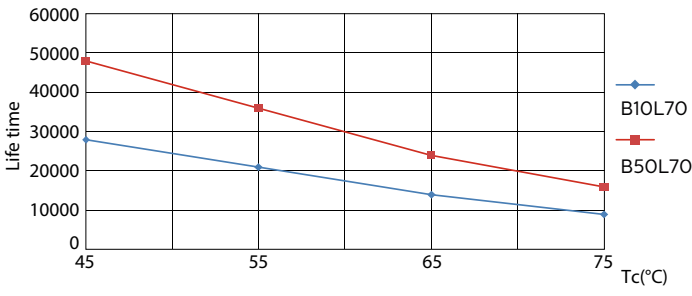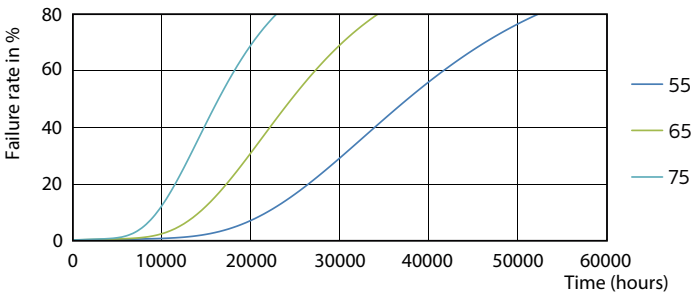

LEDtube 1200mm 17W G13 2100lm

LEDtube 1200mm 17W G13 2100lm

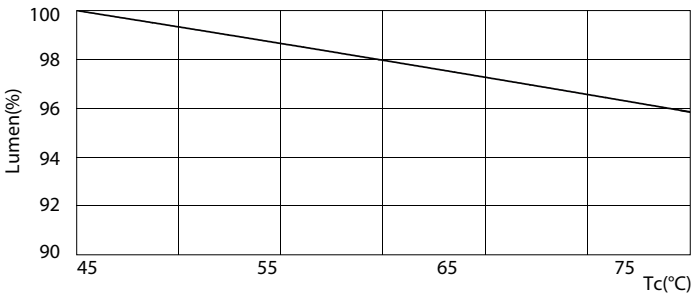

LEDtube 1200mm 17W G13 2100lm

CorePro LEDtube InstantFit T8

