



MASTER LEDspot MV Value

MAS LED spot VLE D 7-80W GU10 865 36D

Delivering a warm, halogen-like accent beam, MASTER LEDspot MV is a perfect fit for spot lighting (track, corridors, lift lobbies, display cases and cabinets) in the hospitality industry. It is particularly suitable to public areas where the light is on 24/7, such as lobbies, corridors, stairwells. MASTER LEDspot MV delivers huge energy savings and minimises maintenance cost without any compromise on brightness, enabling hospitality owners to achieve a return on their investment within one year. These LEDspots are compatible with most existing fixtures with a GU10 holder and designed as a retrofit replacement for halogen or incandescent spots. The dimmable versions drive further efficiencies, while helping to create the desired atmosphere. For environments where the right atmosphere needs to be created (e.g. bars and restaurants), the “DimTone” feature could be useful. This is a LED feature that creates a warmer tone once light is dimmed down to lower intensities.

Product data

General Information	
Cap base	GU10 [GU10]
Nominal lifetime (nom.)	25000 h
Switching cycle	50000X
Technical type	7-80W
Light Technical	
Colour Code	865 [CCT of 6,500 K]
Beam Angle (Nom)	36 °
Lamp Luminous Flux 25°C EL (Nom)	610 lm
Lamp Luminous Flux (Nom)	610 lm
Luminous intensity (nom.)	1200 cd

Colour Designation	Cool Daylight
Rated beam angle	36 °
Colour Temperature, horizontal (Nom)	6500 K
Lamp Luminous Efficacy EM (Nom)	87.14 lm/W
Colour consistency	<6
Colour Rendering Index,horiz (Nom)	80
LLMF at end of nominal lifetime (nom.)	70 %
Luminous Flux in 90° Cone (Rated)	610 lm
Operating and Electrical	
Input frequency	50 to 60 Hz
Power (Rated) (Nom)	7 W

MASTER LEDspot MV Value

Lamp current (nom.)	35 mA
Starting time (nom.)	0.5 s
Warm-up time to 60% light (nom.)	0.5 s
Power factor (nom.)	0.8
Voltage (Nom)	220-240 V

Temperature

T-Case maximum (nom.)	85 °C
-----------------------	-------

Controls and Dimming

Dimmable	Yes
----------	-----

Approval and Application

Energy efficiency label (EEL)	A+
-------------------------------	----

Suitable for accent lighting	Yes
Energy Consumption kWh/1000 h	7 kWh


Product Data

Full product code	871869670801900
Order product name	MAS LED spot VLE D 7-80W GU10 865 36D
EAN/UPC – product	8718696708019
Order code	929001349602
Numerator – quantity per pack	1
Numerator – packs per outer box	10
Material no. (12NC)	929001349602
Net weight (piece)	0.038 kg

Warnings and Safety

- Operating temperature range is between -20° C and 45° C ambient
- Only to apply in dry or damp locations and most of open fixtures with lamp-holders that offer sufficient space (10 mm free air space)
- Not intended for use with emergency light fixtures or exit lights



Dimensional drawing



GU10 230V7W-80W 570lm 36D 6500K GU10 Dim

Product	D	C
MAS LED spot VLE D 7-80W GU10 865 36D	50 mm	54 mm


Photometric data



MASTER LEDspotMV 80W GU10 865 36D VLE

MASTER LEDspot MV Value

Photometric data

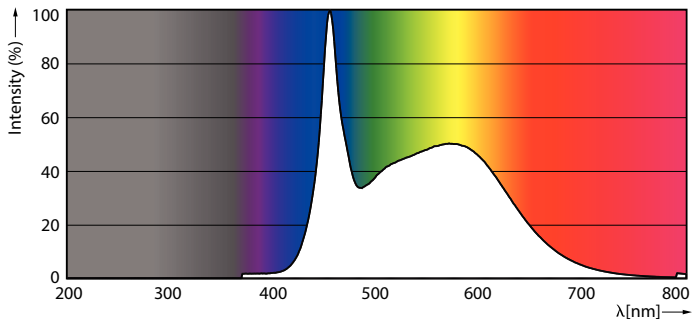

Lifetime

