



MASTER VALUE LEDspot MV

MASTER LED spot VLE DT 3.7-35W GU10 927 36D

Delivering a warm, halogen-like accent beam, MASTER LEDspot MV is a perfect fit for spot lighting (track, corridors, lift lobbies, display cases and cabinets) in the hospitality industry. It is particularly suitable to public areas where the light is on 24/7, such as lobbies, corridors, stairwells. MASTER LEDspot MV delivers huge energy savings and minimizes maintenance cost without any compromise on brightness, enabling hospitality owners to achieve a return on their investment within one year. These LEDspots are compatible with most existing fixtures with a GU10 holder and designed as a retrofit replacement for halogen or incandescent spots. The dimmable versions drive further efficiencies, while helping to create the desired atmosphere.

Warnings and Safety

- Operating temperature range is between -20° C and 45° C ambient
- Only to apply in dry or damp locations and most of open fixtures with lamp-holders that offer sufficient space (10 mm free air space)
- Not intended for use with emergency light fixtures or exit lights

Product data


General Information			
Cap-Base	GU10 [GU10]	Beam Angle (Nom)	36 degree(s)
Nominal lifetime	25,000 hour(s)	Luminous Flux	260 lm
Switching Cycle	50,000	Luminous Intensity (Nom)	500 cd
Lighting Technology	LED	Color Designation	Warm White (WW)
EU RoHS compliant	Yes	Correlated Color Temperature (Nom)	2700 K
		Luminous Efficacy (rated) (Nom)	78.38 lm/W
		Color Consistency	<6
		Color rendering index (CRI)	90
		LLMF At End Of Nominal Lifetime (Nom)	70 %
Light Technical			
Color Code	922-927 [CCT of 2200K-2700K]		

MASTER VALUE LEDspot MV

Luminous Flux in 90° Cone (Rated)	260 lm
Operating and Electrical	
Line Frequency	50 to 60 Hz
Input Frequency	50 to 60 Hz
Power Consumption	3.7 W
Lamp Current (Nom)	20 mA
Wattage Equivalent	35 W
Starting Time (Nom)	0.5 s
Warm-up time to 60% light	0.5 s
Power Factor (Fraction)	0.8
Voltage (Nom)	220-240 V
Temperature	
T-Case Maximum (Nom)	80 °C
Controls and Dimming	
Dimmable	Yes
Mechanical and Housing	
Bulb Shape	PAR16 [PAR 2 inch/50mm]

Approval and Application	
Suitable For Accent Lighting	Yes
Energy Consumption kWh/1000 h	4 kWh
EyeComfort	Yes
Product Data	
Order product name	MAS LED spot VLE DT 3.7-35W GU10 927 36D
Full product name	MASTER LED spot VLE DT 3.7-35W GU10 927 36D
Full product code	871869670809500
Order code	70809500
Material Nr. (12NC)	929001350002
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8718696708095
Numerator - Packs per outer box	10
EAN/UPC - Case	8718696708101


Dimensional drawing




Product	D	C
MAS LED spot VLE DT 3.7-35W GU10 927 36D	50 mm	54 mm

MASTER VALUE LEDspot MV


Photometric data

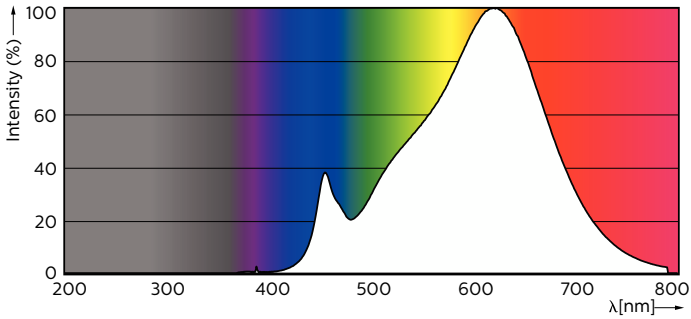

Spectral Power Distribution Colour - MAS LED spot VLE DT 3.7-35W GU10 927 36D




Light Distribution Diagram - MAS LED spot VLE DT 3.7-35W GU10 927 36D



© 2023 Masco Lighting Ltd. All rights reserved. Page 10

Accent Lighting Spots - MAS LED spot VLE DT 3.7-35W GU10 927 36D

Lifetime

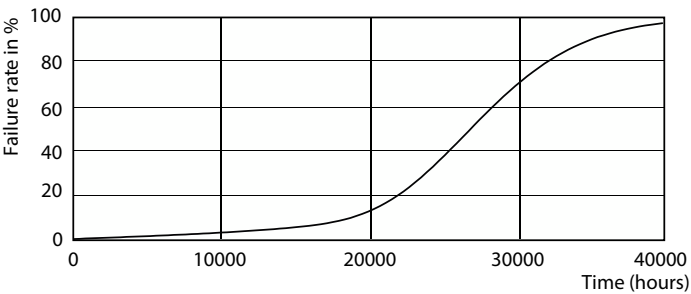

Life Expectancy Diagram - MAS LED spot VLE DT 3.7-35W GU10 927 36D



Lumen Maintenance Diagram - MAS LED spot VLE DT 3.7-35W GU10 927 36D

MASTER VALUE LEDspot MV

