



MASTER LEDbulb

MAS LED bulb DT 9-60W E27 927-922 A60 FR

MASTER LEDbulb range delivers a dimmable glow effect for a welcoming, warm atmosphere, making it ideal for general lighting applications in the hospitality industry. Its unique design radiates warm light in all directions, making it a true alternative to the incandescent lamp. It is particularly suitable for public areas such as lobbies, corridors, stairwells, where the light is always on. Compatible with existing fixtures with an E27 or a B22 holder and designed for retrofit replacement of incandescent bulbs, MASTER LEDbulb delivers huge energy savings and minimises maintenance cost without any compromise on light quality.

Product data

General Information	
Cap base	E27 [E27]
RoHS mark	RoHS mark
Nominal lifetime (nom.)	25000 h
Switching cycle	100000X
Technical type	9-60W
Light Technical	
Colour Code	922-927 [CCT of 2,200 K-2,700 K]
Technical Beam Angle (Nom)	200 °
Lamp Luminous Flux 25°C EL (Nom)	806 lm
Lamp Luminous Flux (Nom)	806 lm
Colour Designation	Warm white (WW)
Colour Temperature, horizontal (Nom)	2200-2700 K
Lamp Luminous Efficacy EM (Nom)	89.00 lm/W
Colour consistency	<6
Colour Rendering Index, horiz (Nom)	90
LLMF at end of nominal lifetime (nom.)	70 %

Operating and Electrical	
Input frequency	50 to 60 Hz
Power (Rated) (Nom)	9 W
Lamp current (nom.)	46 mA
Wattage equivalent	60 W
Starting time (nom.)	0.3 s
Warm-up time to 60% light (nom.)	0.5 s
Power factor (nom.)	0.8
Voltage (Nom)	220-240 V
Temperature	
T-Case maximum (nom.)	85 °C
Controls and Dimming	
Dimmable	Yes
Mechanical and Housing	
Bulb finish	Frosted (FR)

MASTER LEDbulb

Approval and Application

Energy efficiency label (EEL)	A+
Energy Consumption kWh/1000 h	9 kWh

Product Data


Full product code	87186967071100
Order product name	MAS LED bulb DT 9-60W E27 927-922 A60 FR
EAN/UPC – product	8718696707111

Order code	929001351402
Numerator – quantity per pack	1
Numerator – packs per outer box	10
Material no. (12NC)	929001351402
Net weight (piece)	0.060 kg

Warnings and Safety

- Operating temperature range is between -20° C and 45° C ambient
- Only to apply in dry or damp locations and most of open fixtures with lamp-holders that offer sufficient space (10 mm free air space)
- Not intended for use with emergency light fixtures or exit lights



Dimensional drawing



A60S+ 230V9-60W806lm2.2-2.7KK E27D CRI90

Product	D	C
MAS LED bulb DT 9-60W E27 927-922 A60 FR	60 mm	110 mm


Photometric data

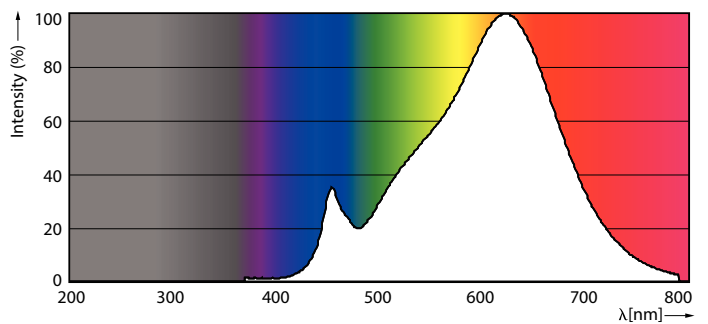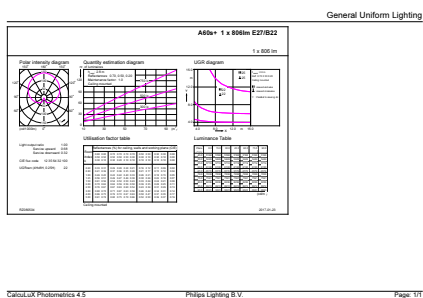



MASTER LEDbulb 60W E27 922-927 FR A60

MASTER LEDbulb

Photometric data



Lifetime

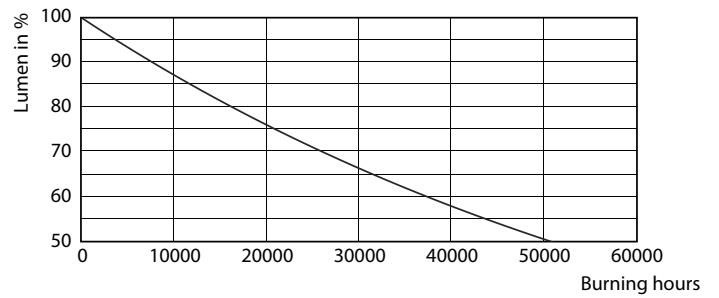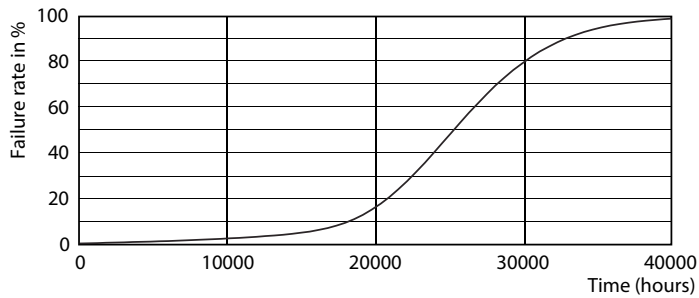

MASTER LEDspot PAR 50W E27 827 25D

MASTER LEDspot PAR 50W E27 827 25D

