



TrueForce LED Industrial and Retail (Highbay – HPI/SON/HPL)

TrueForce LED HPI ND 110-88W E40 840 60D

Philips TrueForce LED Industrial and Retail lamps give you a quick and easy payback solution to replace HID lamps in High-bay applications. The solution gives you the LED benefits of energy-efficiency and long-lifetime, plus the initial investment is low. With unique lamp design and compatibility, you can directly retrofit HID lamps with TrueForce LED lamps without changing the fixtures or gear. Multiple beam angle options and high colour-rendering index enhance the lighting distribution while creating a comfortable, safe and high-productivity environment.

Warnings and Safety

• EM version requires an EM ballast to operate. Please refer to the installation guide or consult a Philips Lighting representative.

Product data

General Information	
Cap base	E40 [E40]
Nominal lifetime	50,000 h
Switching Cycle	50,000
Lighting Technology	LED
EU RoHS compliant	Yes
Light Technical	
Colour Code	840 [CCT of 4000K]
Beam angle (nom.)	60 degree(s)

Luminous Flux	11,000 lm
Colour designation	Cool White (CW)
Correlated Colour Temperature	4000 K
Luminous efficacy (rated) (nom.)	125.00 lm/W
Colour consistency	<6
Colour rendering index (CRI)	80
LLMF at end of nominal lifetime (nom.)	70 %
Operating and Electrical	
Line Frequency	50 Hz


Datasheet, 2023, April 29 data subject to change

TrueForce LED Industrial and Retail (Highbay - HPI/SON/HPL)

Input frequency	50 Hz
Power Consumption	88 W
Lamp current (nom.)	2,500 mA
Starting time (nom.)	1.2 s
Warm-up time to 60% light	1.2 s
Power Factor (Fraction)	0.7
Voltage (nom.)	100-145 V
Temperature	
T-Case maximum (nom.)	90 ℃
Controls and Dimming	
Dimmable	No
Mechanical and Housing	
Bulb shape	Others


97 kWh
TForce LED HPI ND 110-88W E40 840 60D
TrueForce LED HPI ND 110-88W E40 840 60D
871869671378500
71378500
929001356802
1
8718696713785
2
8718696713792

Dimensional drawing



Product	D	С
TForce LED HPI ND 110-88W E40 840 60D	210 mm	250 mm

Photometric data

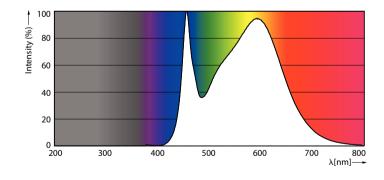




Spectral Power Distribution Colour - TForce LED HPI ND 110-88W E40 840 60D

General uniform lighting - TForce LED HPI ND 110-88W E40 840 60D


TrueForce LED Industrial and Retail (Highbay - HPI/SON/HPL)


Photometric data



Light Distribution Diagram - TForce LED HPI ND 110-88W E40 840 60D


Lifetime

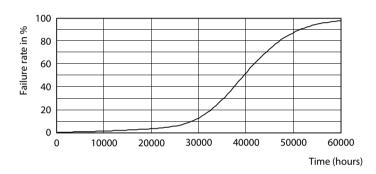

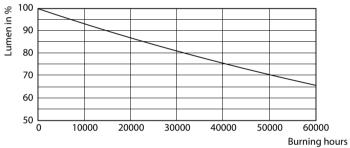

Life Expectancy Diagram - TForce LED HPI ND 110-88W E40 840 60D

Lumen Maintenance Diagram - TForce LED HPI ND 110-88W E40 840 60D

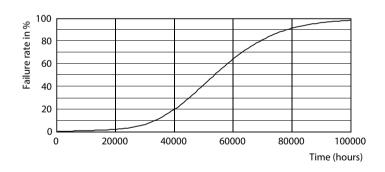

Life Expectancy Diagram - TForce LED HPI ND 110-88W E40 840 60D

TrueForce LED Industrial and Retail (Highbay - HPI/SON/HPL)



© 2023 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.