



# PL-C/T

## 10.5PL-C/T LED/26V-3500 IF 4P 1PK 10/1

Philips PLED 4-pin & 2-pin lamps are an affordable LED solution to replace compact fluorescent lamps. The product provides a natural lighting effect for use in many lighting applications, and provides instant energy savings, making them an environmentally-friendly solution. Available as replacements for 13W, 26W and 32W compact fluorescent lamps.

### Product data


General Information		Starting Time (Nom)	
Base	G24Q/GX24Q [ G24q/GX24q]	Starting Time (Nom)	0.5 s
Main Application	Industrial	Warm Up Time to 60% Light (Nom)	0.5 s
Nominal Lifetime (Nom)	50000 h	Power Factor (Nom)	0.9
Switching Cycle	50000X	Voltage (Nom)	120 V
B50L70	50000 h	<b>Temperature</b>	
<b>Light Technical</b>		T-Ambient (Max)	45 °C
Color Code	835 [ CCT of 3500K]	T-Ambient (Min)	-20 °C
Initial lumen (Nom)	1200 lm	T-Storage (Max)	65 °C
Luminous Flux (Rated) (Nom)	1200 lm	T-Storage (Min)	-40 °C
Correlated Color Temperature (Nom)	3500 K	T-Case Maximum (Nom)	60 °C
Luminous Efficacy (rated) (Nom)	114.00 lm/W	<b>Controls and Dimming</b>	
Color Consistency	<6	Dimmable	Yes
Color Rendering Index (Nom)	82	<b>Mechanical and Housing</b>	
LLMF At End Of Nominal Lifetime (Nom)	70 %	Product Length	100 mm
<b>Operating and Electrical</b>		<b>Approval and Application</b>	
Input Frequency	20000-100000 Hz	Energy Saving Product	Yes
Power (Rated) (Nom)	10.5 W	Approbation Marks	RoHS compliance UL certificate KEMA Keur certificate DLC compliance
Lamp Current (Max)	550 mA		
Lamp Current (Min)	150 mA		

# PL-C/T

Energy Certifications	DLC Standard
DesignLights Consortium Qualified Product List	-
<b>Product Data</b>	
Order product name	10.5PL-C/T LED/26V-3500 IF 4P 10/1
EAN/UPC - Product	046677458423
Order code	458422

Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	10
Material Nr. (12NC)	929001388604
Net Weight (Piece)	0.091 kg
Model Number	9290013886



## Dimensional drawing

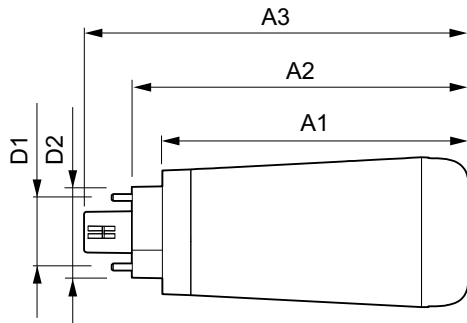

PLED PLC 10.5-26W 1200lm 3500K GX24q

Product	D1	D2	A1	A2	A3
10.5PL-C/T LED/26V-3500 IF 4P 10/1	24.3 mm	29 mm	99.9 mm	109.9 mm	125.5 mm


## Photometric data

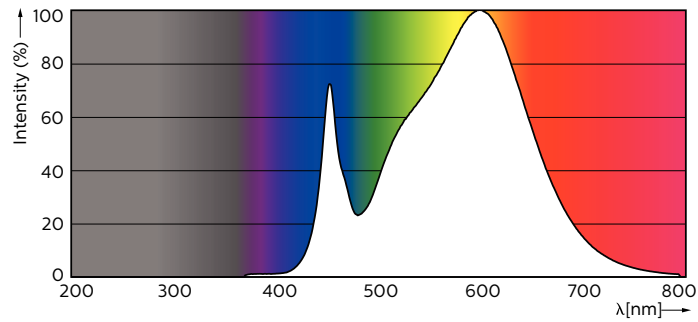

© 2019 Philips Lighting B.V. All rights reserved. Philips Lighting B.V. is a registered trademark of Philips Lighting B.V.



LEDtube PLC 100mm 11W G24Q GX24Q 835 1200lm

LEDtube PLC 100mm 11W G24Q GX24Q 835 1200lm





LEDtube PLC 100mm 11W G24Q GX24Q 827 1200lm

Lifetime

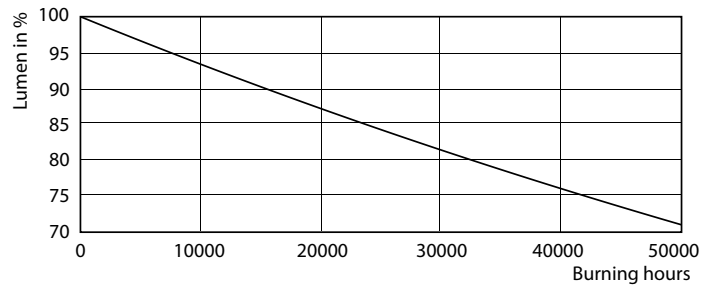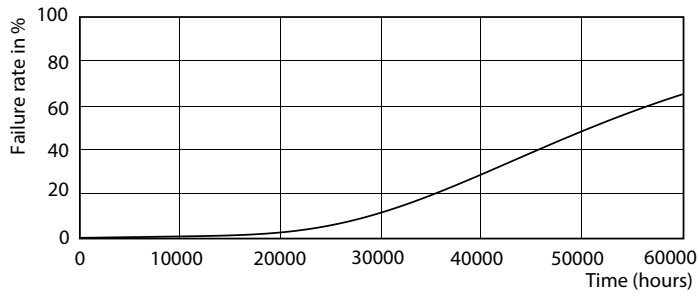


LEDtube PLC 100mm 9W G24Q GX24Q 827 850lm

LEDtube PLC 100mm 9W G24Q GX24Q 827 850lm

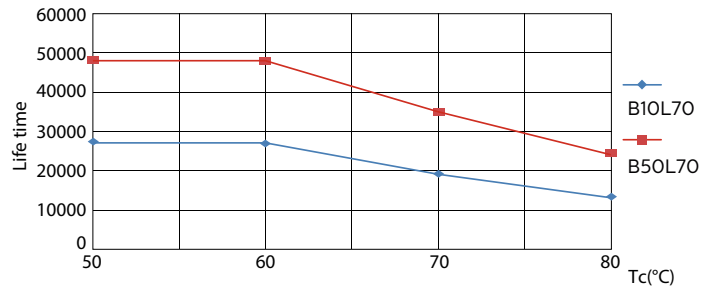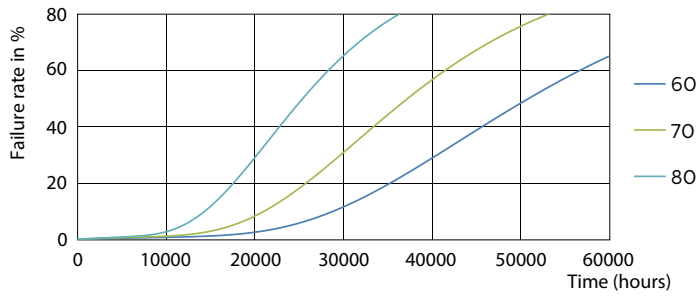

LEDtube PLC 100mm 9W G24Q GX24Q 827 850lm

LEDtube PLC 100mm 9W G24Q GX24Q 827 850lm

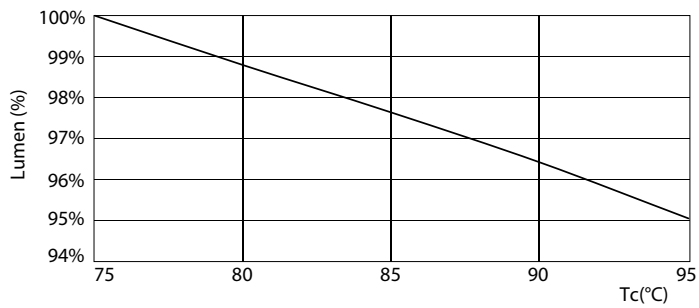

LEDtube PLC 100mm 11W G24Q GX24Q 827 1200lm

