



# MasterConnect LEDtube InstantFit T8

## 15T8 LED/24-3500 IF 6U EasySmart 1PK

Philips MasterConnect LEDtube InstantFit T8 lamp, which is Interact Ready, enables an easy upgrade to a connected lighting system without re-wiring the fixtures. The 2.4GHz mesh networking technology allows integration with a variety of control device, such as sensor and switch. It also offers secure and reliable communication towards the Interact IoT platform or verified third party systems. The result? Greater energy savings, various control possibilities and a more adaptable space!

### Product data

General Information	
Cap-Base	G13 [ Medium Bi-Pin Fluorescent]
Main Application	Industrial
Nominal Lifetime (Nom)	50000 h
Switching Cycle	50000X
B50L70	50000 h
Light Technical	
Color Code	835 [ CCT of 3500K]
Beam Angle (Nom)	160 °
Luminous Flux (Nom)	2000 lm
Luminous Flux (Rated) (Nom)	2000 lm
Rated Beam Angle	160 °
Correlated Color Temperature (Nom)	3500 K
Color Consistency	<6
Color Rendering Index (Nom)	80
LLMF At End Of Nominal Lifetime (Nom)	70 %

Operating and Electrical	
Input Frequency	40000-80000 Hz
Power (Rated) (Nom)	15 W
Lamp Current (Max)	350 mA
Lamp Current (Min)	120 mA
Starting Time (Nom)	0.5 s
Warm Up Time to 60% Light (Nom)	0.5 s
Power Factor (Nom)	0.9
Voltage (Nom)	160-380 V
Temperature	
T-Ambient (Max)	45 °C
T-Ambient (Min)	-20 °C
T-Storage (Max)	65 °C
T-Storage (Min)	-40 °C
T-Case Maximum (Nom)	40 °C

# MasterConnect LEDtube InstantFit T8

## Controls and Dimming

Dimmable	Wireless Dim
----------	--------------

## Mechanical and Housing

Product Length	600 mm
----------------	--------


## Approval and Application

Energy Saving Product	Yes
Approval Marks	UL certificate RoHS compliance DLC compliance
DesignLights Consortium Qualified Product List	DesignLights Consortium Qualified Product List

## Product Data

Order product name	15T8 LED/24-3500 IF 6U EasySmart 1PK
EAN/UPC - Product	046677474027
Order code	929001398104
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	10
Material Nr. (12NC)	929001398104
Net Weight (Piece)	0.270 kg


## Dimensional drawing

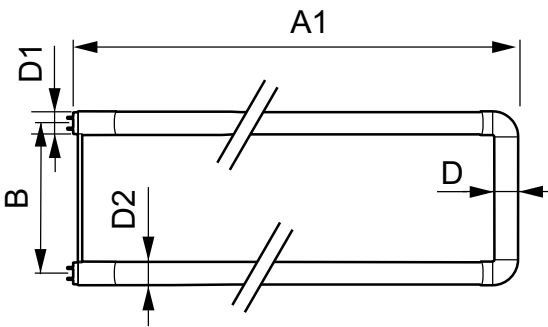


TLED SMART 4ft HF 14-32W 2000lm 3500K

Product	D1	D2	B	A1	D
15T8 LED/24-3500 IF 6U EasySmart 1PK	25.4 mm	27.8 mm	152 mm	570 mm	27.8 mm

## Photometric data

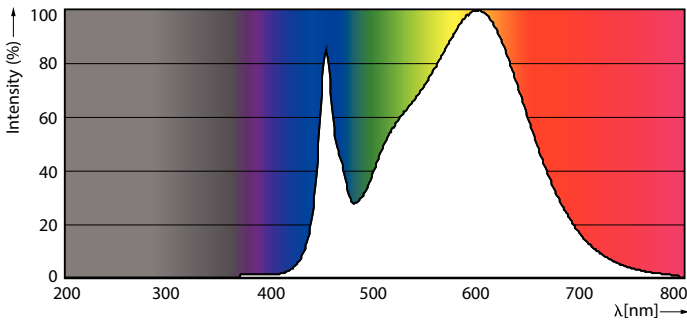

LEDtube 8-15W G13 835 160D IF 6U EasySmart

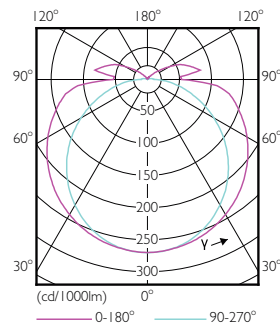


LEDtube 15W G13 830 160D IF 6U EasySmart



# MasterConnect LEDtube InstantFit T8

## Lifetime

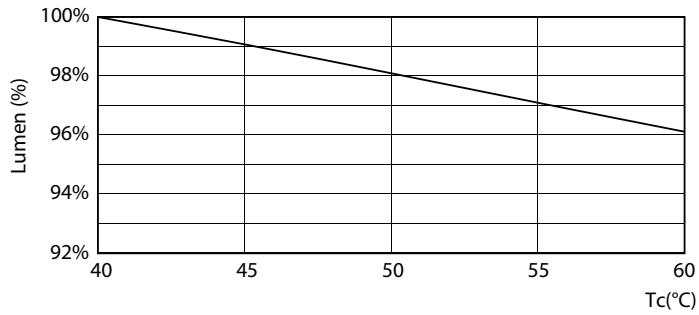

LEDtube 15W G13 830-850 160D IF 6U EasySmart

