



# **LED G25**

# 2.7G25/PER/827/CL/G/E26/DIM 6/1CT

Philips G25 LED Lamps offer energy saving ambience with an elegant effect. Their unique design provides light in all directions, giving lighting designers a long life alternative to standard incandescent sources.

## Product data


General Information	
Cap-Base	E26 [Single Contact Medium Screw]
Nominal lifetime	15,000 hour(s)
Switching Cycle	20,000
Lighting Technology	LED
EU RoHS compliant	Yes
Light Technical	
Color Code	827 [CCT of 2700K]
Luminous Flux	180 lm
Color Designation	Warm White (WW)
Correlated Color Temperature (Nom)	2700 K
Luminous Efficacy (rated) (Nom)	66.00 lm/W
Color Consistency	<6
Color rendering index (CRI)	80
LLMF At End Of Nominal Lifetime (Nom)	70 %
Operating and Electrical	
Line Frequency	60 Hz
Input Frequency	60 Hz
Power Consumption	2.7 W
Lamp Current (Nom)	25 mA
Wattage Equivalent	25 W
Starting Time (Nom)	0.5 s

Warm-up time to 60% light	0.5 s
Power Factor (Fraction)	0.7
Voltage (Nom)	120 V
Temperature	
T-Case Maximum (Nom)	55 °C
Controls and Dimming	
Dimmable	Yes
Mechanical and Housing	
Bulb Finish	Clear
Bulb Shape	G25 (G25)
Approval and Application	
Energy Consumption kWh/1000 h	- kWh
Product Data	
Order product name	2.7G25/PER/827/CL/G/E26/DIM 6/1CT
Full product name	2.7G25/PER/827/CL/G/E26/DIM 6/1CT
Order code	929001843404
Material Nr. (12NC)	929001843404
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	046677478780

Datasheet, 2023, December 6 data subject to change


Numerator - Packs per outer box	6
EAN/UPC - Case	50046677478785


## Dimensional drawing




Product	D	С
2.7G25/PER/827/CL/G/E26/DIM 6/1CT	35 mm	97 mm


#### Photometric data





General uniform lighting - 2.7G25/PER/827/CL/G/E26/DIM 6/1CT







Light Distribution Diagram - 2.7G25/PER/827/CL/G/E26/DIM 6/1CT

## **LED G25**

#### Lifetime

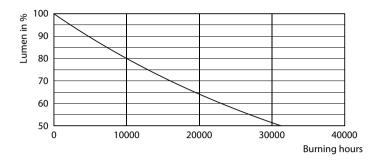

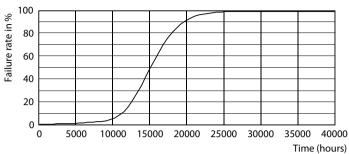

Lumen Maintenance Diagram - 2.7G25/PER/827/CL/G/E26/DIM 6/1CT

Life Expectancy Diagram - 2.7G25/PER/827/CL/G/E26/DIM 6/1CT

